


DATENBLATT

FFC0.50D30-0052L-2-2-08-08-AU-501864-3091

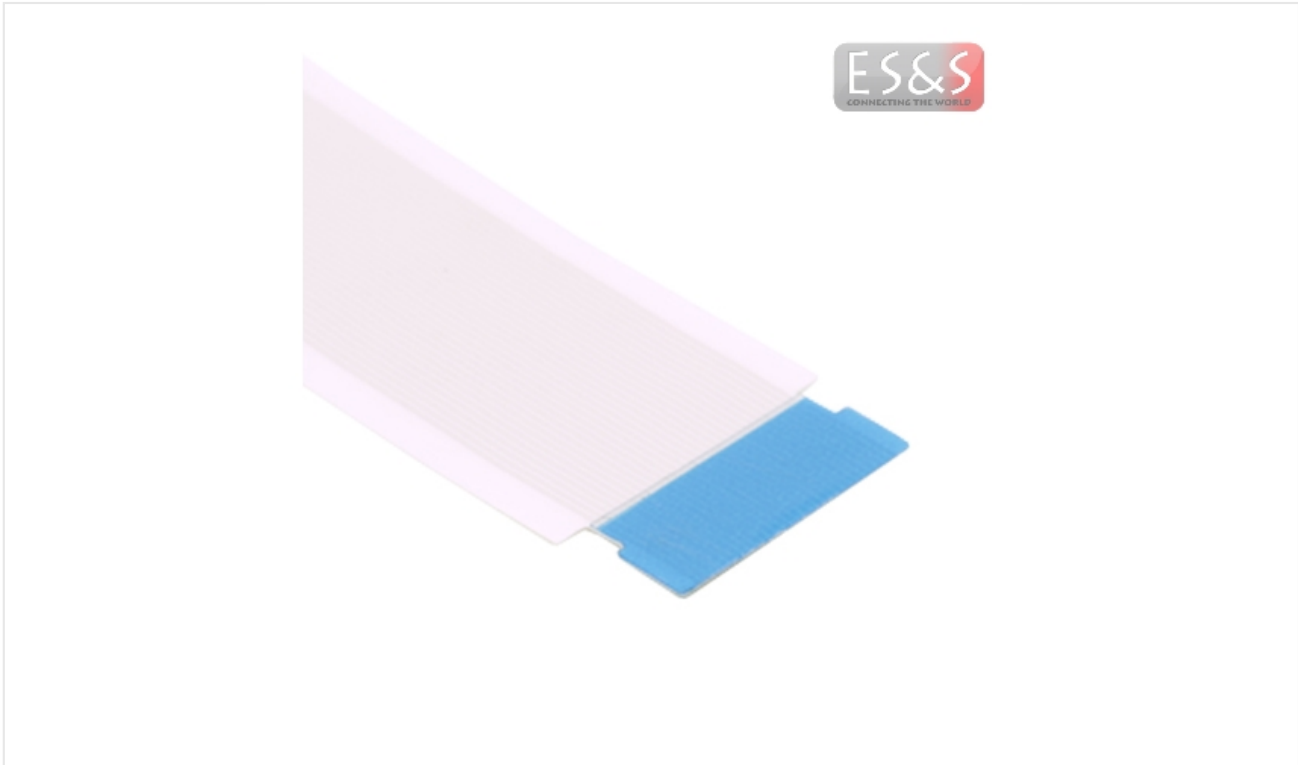

ES&S Solutions GmbH
Gewerbering 2
41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0
Fax: +49 (0)2162-266-18-88
E-Mail: info@esskabel.de

www.esskabel.de

Disclaimer: In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

BESCHREIBUNG

Diese FFC-Kabel-Variante ist durch die Ausstanzung, den sogenannten "Side-Catcher", speziell für die Steckverbinder-Serie des Herstellers Molex Serie 501864 (Header).

TECHNISCHE DATEN:

- Leitungsanzahl: 30
- Raster 0.50 mm (+/- 0.1 mm)
- Typ D (gegenseitig abisoliert und verstärkt)
- Querschnitte: 0.035.x0.30 mm (+/-0.05 mm)
- Kontaktlänge: 4 mm (+/- 1.0 mm)
- Verstärkungslänge: 8 mm (+/- 2.00 mm)
- Kontaktstärke im Steckbereich: 0.3 mm (+/- 0.05 mm)
- 80°C, 30 V, AC, VW-1
- Gesamtlänge 60 mm
- [UL 2896](#)

FFC Kabel passend für Steckverbinderserien:

MOLEX SERIE 501864&NBSP:

- MLX-501783-3009
- MLX-501784-3009

Passend für folgendes Display: G170J1-LE1

FFC0.50A30-0052L-4-4-08-08-AU-SC-501864-3091 ebenfalls verfügbar. (Typ A gleichseitig abisoliert und verstärkt)

BILDER



ES&S Solutions GmbH
Gewerbering 2
41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0
Fax: +49 (0)2162-266-18-88
E-Mail: info@esskabel.de

www.esskabel.de

Disclaimer: In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support