

DATENBLATT

ADA-FLEX-45P-050-SET



ES&S Solutions GmbH
Gewerbering 2
41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0
Fax: +49 (0)2162-266-18-88
E-Mail: info@esskabel.de

www.eskabel.de

Disclaimer: In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

BESCHREIBUNG

Dieser Adapter dient zum komfortablen Verbinden von FFC oder FPC Kabeln des Rasters 0.50 mm / 45 polig in der Stärke 0.30 mm an weiterführende Steckverbinder.

Eine kleine Adapterplatine ist bestückt mit einem Folienkabelstecker (unten kontaktierend) und einer Stiftleiste zur Aufnahme eines MICRO-IDC Steckers für Flachbandkabel. Der Folienstecker kann entweder das beiliegende FFC Kabel oder ein schon am Gerät montiertes FPC (Flexible Printed Circuit) aufnehmen.

VORTEILE:

- klein
- leicht
- flach
- einfach zu bedienen
- keine Eigenentwicklung für kleine Stückzahlen nötig
- an Kundenwünsche anpassbar

TECHNISCHE DATEN:

- Abmessung: 45,1 (L) x 25,1 (B) x 6,7 (H) (in mm)
- Temperaturbereich: -20 °C bis 85 °C
- Gewicht : 46 g

DER STANDARD LIEFERUMFANG ENTHÄLT ein 200 mm langes FFC Kabel (Typ A = gleichseitig kontaktierend) in passender Polzahl, sowie ein 500 mm langes Flachkabel (R = 0.635 mm) in passender Polzahl, 45 polige Buchse im R = 1.27 mm. Der FFC Stecker ist für 0.30 mm (+/- 0.05 mm) dicke Folienkabel ausgelegt. Der Stecker kontaktiert das FFC Kabel von unten.

ANDERE LÄNGEN SIND KURZFRISTIG LIEFERBAR.

Dieses Kabel unterstützt u.a. folgende Displays:

A070VW01, C070VW02, LC201V1, LQ035Q7DB02R, LQ035Q7DB03F, LQ035Q7DH06, LQ035Q7DH07,

ES&S Solutions GmbH
Gewerbering 2
41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0
Fax: +49 (0)2162-266-18-88
E-Mail: info@esskabel.de

www.esskabel.de

Disclaimer: In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

LQ070Y5DG02, LTE400WQ, NL6448AC63-01, NL6448BC18-01F, PD035VX2, PD035VX3, T-51963GD035J-MLW

Kompatible Steckverbinder:

FH12A-45S-0.5SH, FH12-45S-0.5SH, FA5B045HP1R3000 und andere...



ES&S Solutions GmbH
Gewerbering 2
41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0
Fax: +49 (0)2162-266-18-88
E-Mail: info@esskabel.de

www.esskabel.de

Disclaimer: In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

BILDER

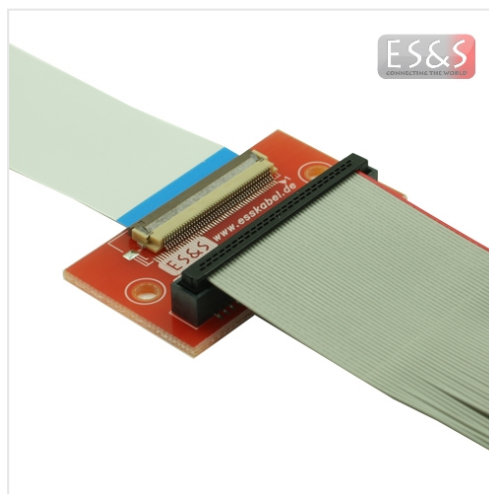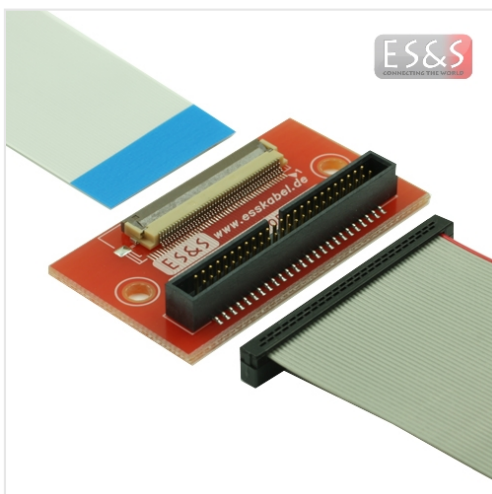

ES&S Solutions GmbH
 Gewerbering 2
 41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0
 Fax: +49 (0)2162-266-18-88
 E-Mail: info@esskabel.de

www.esskabel.de

Disclaimer: In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support