



## BESCHREIBUNG

Diese 10 polige ungeschirmte AWG28 Rundleitung mit einem Litzendurchmesser von 0,60 mm ist besonders für LED Backlight Anwendungen geeignet.

### Technische Details:

- 
- AWG28, ungeschirmt

---

  - 10 pol. verzinnte Kupferlitze

---

  - halogenfrei / LSOH und RoHS frei

---

  - Außendurchmesser: 4,0 mm

---

  - Litzendurchmesser: 0,60 mm

---

  - Isolationsmantel: MPPE-PE

---

  - weiße Leitung, 1 Rolle = 100 m

---


  - Temperaturbereich: -10°C to 80°C,30V

---

  - UL 21455

Diese Leitung erhalten Sie bei uns auch in einer 10 oder 5 paarig verdrehten Variante (**LTG-MPPE-10X2XAWG28-UL21455-WH / LTG-MPPE-05X2XAWG28-UL21455-WH**) oder in einer vier und sechs poligen Version (**LTG-MPPE-4XAWG28-UL21455-WH / LTG-MPPE-6XAWG28-UL21455-WH**).

## FOTOS

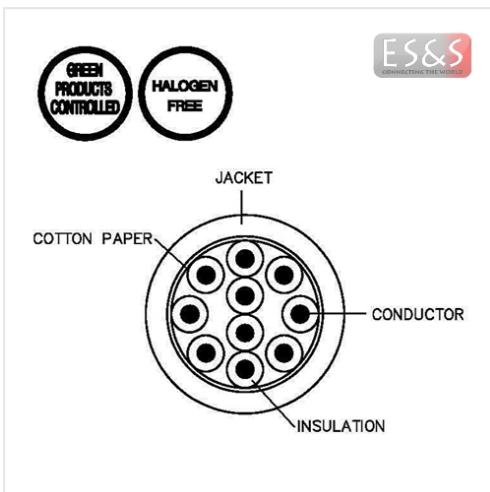

## **DISCLAIMER**

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support