

## DATENBLATT

# LTG-MPPE-06XAWG28-UL21455-WH



ES&S Solutions GmbH  
Gewerbering 2  
41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0  
Fax: +49 (0)2162-266-18-88  
E-Mail: [info@esskabel.de](mailto:info@esskabel.de)

[www.esskabel.de](http://www.esskabel.de)

**Disclaimer:** In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

## BESCHREIBUNG



Diese 6 polige ungeschirmte AWG28 Rundleitung mit einem Litzendurchmesser von 0,60 mm ist besonders für LED Backlight Anwendungen geeignet.

## TECHNISCHE DETAILS:

- AWG28, ungeschirmt
- 6 pol. verzinnete Kupferlitze
- halogenfrei / LSOH und RoHS frei
- Außendurchmesser: 3,5 mm
- Litzendurchmesser: 0,60 mm
- Isolationsmantel: MPPE-PE
- weiße Leitung, 1 Rolle = 500 m
- Temperaturbereich: -10°C to 80°C,30V
- [UL 21455](#)

Diese Leitung erhalten Sie bei uns auch in einer 4 oder 10 poligen Variante ([LTG-MPPE-4XAWG28-UL21455-WH](#) / [LTG-MPPE-10XAWG28-UL21455-WH](#)) oder in einer fünf und zehn paarig verdrehten Version ([LTG-MPPE-5X2XAWG28-UL21455-WH](#) / [LTG-MPPE-10X2XAWG28-UL21455-WH](#)).

BILDER

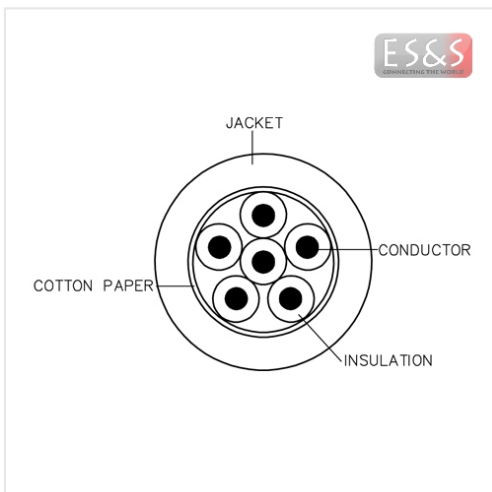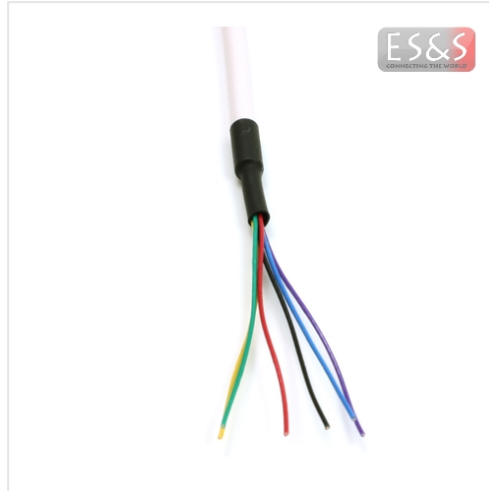

Disclaimer: In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

ES&S Solutions GmbH  
 Gewerbering 2  
 41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0  
 Fax: +49 (0)2162-266-18-88  
 E-Mail: info@esskabel.de

[www.esskabel.de](http://www.esskabel.de)