


## DATENBLATT

# STE-ACES-51700-0520W-001

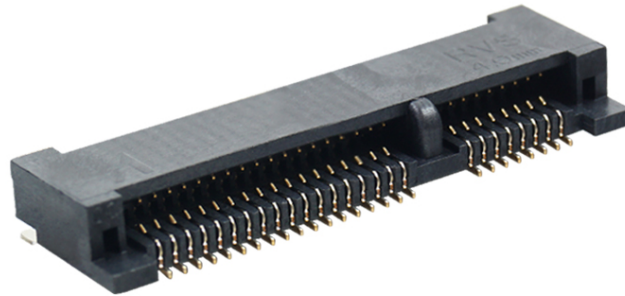

ES&S Solutions GmbH  
Gewerbering 2  
41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0  
Fax: +49 (0)2162-266-18-88  
E-Mail: [info@esskabel.de](mailto:info@esskabel.de)

[www.esskabel.de](http://www.esskabel.de)

**Disclaimer:** In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

## BESCHREIBUNG

Hier bieten wir Ihnen den neuen [ACES](#) Stecker Typ 51700 im 0.8 mm Raster an.

Der ACES Steckverbinder ist für PCI Express Mini Card Anwendungen konzipiert. Die Schnittstelle unterstützt PCI Express, USB 2.0 sowie USB 3.0 Verbindungen. Die meisten Notebooks (ab 2005) basieren auf PCI Express und verfügen über Steckplätze für PCI Express Mini Karten.

Eine Verriegelungsmöglichkeit zur Befestigung des Moduls am Steckverbinder ist erhältlich. Die Verriegelung hat auf beiden Seiten Mechanismen für den Modulauswurf. Zwei Arten von Modulbefestigungshöhen sind verfügbar. Ein Abstandhalter ermöglicht die Platzierung von Komponenten mit einer Höhe von unter 1,8 mm unter dem Modul.

### Technische Daten:

- Steckverbinder: ACES 51700, 52 polig, schwarz
- Raster: 0.8 mm
- Höhe: 4,00 mm
- PCB Montage: SMT
- rechts gewinkelt
- Produkthöhe (mm): 4,00
- Höhe der Mitte (mm): 1,60
- PCB bis Oberkante Höhe (mm): 1,60
- Steckzyklus: 50
- RoHS konform
- Mindestbestellmenge: 850 Stk. (Tape oder Rolle)
- Temperaturbereich: -40 ? ~ +80 ?

### Elektrische Eigenschaften:

- Spannung: 50 V AC pro Kontakt
- Stromstärke: 0,5 A pro Kontakt
- Kontaktwiderstand: max. 75 m?

ES&S Solutions GmbH  
Gewerbering 2  
41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0  
Fax: +49 (0)2162-266-18-88  
E-Mail: [info@esskabel.de](mailto:info@esskabel.de)

[www.esskabel.de](http://www.esskabel.de)

Disclaimer: In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

- Dielektrische Stehspannung: min. 300 V AC
- Isolationswiderstand: min. 500 M?

Weitere ACES Steckverbinder der MM60 Serie:

- MM60-52B1-B1-R850
- MM60-52B1-E1-R650
- MM60-52B1-G1-R850

Verriegelung: MM60-EZH039-B5-R850, MM60-EZH059-B5-R650

Abstandhalter: NT1R3000, NT4R1600

ES&S Solutions GmbH  
Gewerbering 2  
41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0  
Fax: +49 (0)2162-266-18-88  
E-Mail: [info@esskabel.de](mailto:info@esskabel.de)

[www.esskabel.de](http://www.esskabel.de)

Disclaimer: In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

## BILDER



**Disclaimer:** In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

ES&S Solutions GmbH  
Gewerbering 2  
41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0  
Fax: +49 (0)2162-266-18-88  
E-Mail: info@esskabel.de

[www.esskabel.de](http://www.esskabel.de)