

## DATENBLATT

# ADA-FLEX-30P-050-SET



ES&S Solutions GmbH  
Gewerbering 2  
41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0  
Fax: +49 (0)2162-266-18-88  
E-Mail: info@esskabel.de

[www.esskabel.de](http://www.esskabel.de)

**Disclaimer:** In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

## BESCHREIBUNG

This adapter is designed to connect FFC or FPC cables (30-pin, pitch 0.50 mm, thickness 0.30 mm) comfortably with other connector systems.

A small adapter board is equipped with a flex connector (bottom contact) and a header to conjoin the MICRO-IDC connector for flat cables. The flex connector is either used with the attached FFC cable or with FPC (Flexible Printed Circuit) cables already installed to the component.

Advantages:

- small
- light weight
- flat
- easy handling
- no special design for small quantities needed
- customized design according to your requirements possible

**THE STANDARD SET INCLUDES** a FFC cable (length = 200 mm, type A = stripped equilaterally) with matching number of poles as well as a flat cable (length = 500 mm) with matching number of poles.

The FFC connector is designed for flex cables of 0.30 mm thickness (+/- 0.05 mm). The jack is provided for bottom connection with the FFC cable.

## VARIOUS LENGTHS AVAILABLE ON REQUEST.

This cable supports the following displays (amongst others):

A040CN01, AT080TN42, LTA320W1-L01, LTA320W1-L02, PA025XSC, PA035XSJ, PA035XSL, PD035OX1, PD050VX2, PD064VT2, PD064VX1, PM070WX1, PM070WX2, PM102WX1, PW065XS1, PW070XS1, PW084XS1, PW090XS2, T-51383L070J-FW-P-AA

Compatible connectors:

ES&S Solutions GmbH  
Gewerbering 2  
41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0  
Fax: +49 (0)2162-266-18-88  
E-Mail: [info@esskabel.de](mailto:info@esskabel.de)

[www.esskabel.de](http://www.esskabel.de)

FH12A-30S-0.5SH, FH12-30S-0.5SH, FA5B030HP1R3000 and others.

## DIMENSIONS

- Länge / Length: 45,2 mm
- Breite / Width: 25,1 mm
- Höhe / Height: 6,7 mm

## RANGE OF TEMPERATURES

- Betriebstemperatur / Operating temperature: Min: -20,00 °C Max: 85,00 °C
- Lagertemperatur / Storage temperature: Min: -40,00 °C Max: 85,00 °C

## WEIGHT

- Bruttogewicht / Gross weight: 51,1 g
- Nettogewicht / Net weight: 44,0 g



ES&S Solutions GmbH  
Gewerbering 2  
41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0  
Fax: +49 (0)2162-266-18-88  
E-Mail: [info@esskabel.de](mailto:info@esskabel.de)

[www.esskabel.de](http://www.esskabel.de)

Disclaimer: In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

**BILDER**

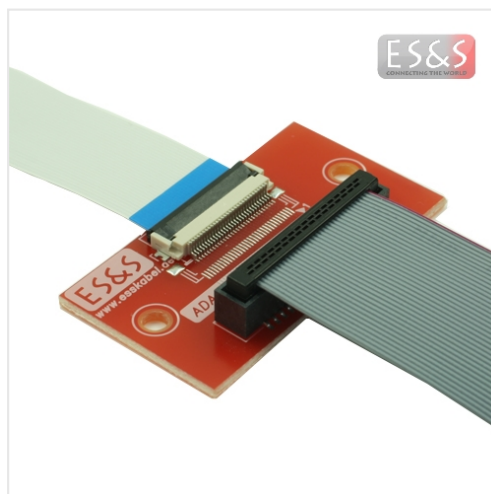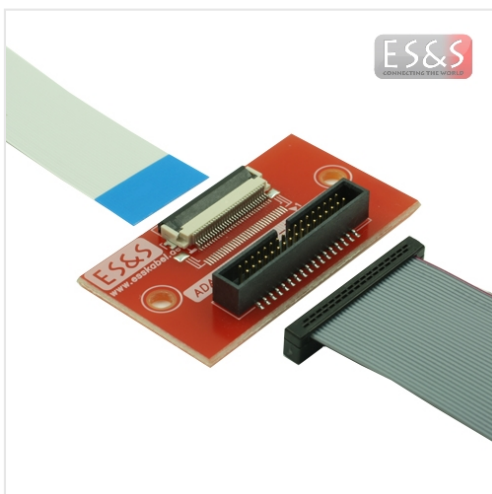

ES&S Solutions GmbH  
Gewerbering 2  
41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0  
Fax: +49 (0)2162-266-18-88  
E-Mail: info@esskabel.de

[www.esskabel.de](http://www.esskabel.de)

**Disclaimer:** In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support