

DATENBLATT

KAB-DF19G-14S-0500RK



ES&S Solutions GmbH
Gewerbering 2
41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0
Fax: +49 (0)2162-266-18-88
E-Mail: info@esskabel.de

www.esskabel.de

Disclaimer: In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

BESCHREIBUNG

Dieser Kabelsatz bietet Ihnen die Möglichkeit, schnell und einfach eine Verbindung zwischen einem Display mit dem Steckverbinder DF19G-14S-1C des Herstellers Hirose und einem beliebigen Grafikboardsteckverbinder herzustellen. Wir liefern Ihnen ein geschirmtes Rundkabel mit 14 montierten Kontakten, ungesteckt, die zweite Seite des Kabels ist unbearbeitet. Sie können dann ganz einfach nach Ihren Kabelplänen die Kontakte in die entsprechenden Gehäusekammern bestücken und so eine optimale Funktion und Zuweisung der Paare zu den Signalstrukturen erzielen.

Dieses Kabel ist für Muster und Kleinstserien geeignet.

TECHNISCHE DATEN:

- Seite 1: montierte Crimpkontakte Typ STM-24013PS-00-RF-A für Steckverbinder DF19G-14S-1C, ungesteckt anbei
- Seite 2: unbearbeitet, offen
- geschirmtes Rundkabel, twisted pair, AWG 28, L = 500 mm
- UL20276
- Temperaturbereich: -20 °C bis 85 °C
- Gewicht : 25,7 g

VORTEILE AUF EINEN BLICK:

- individuell bestückbar
- individuell herstellbar
- Adern farblich kodiert
- genormtes Raster
- **dieses Kabel wird ungesteckt und mit beiliegender Buchse angeliefert**

Die Konfektionierung dieser Leitung sowie die Herstellung des gesamten anschlussfertigen Kabels bieten wir Ihnen gerne auch als Mustermenge an. Bitte kontaktieren Sie uns. Wir machen Ihnen gerne ein unverbindliches Angebot.

Dieses Kabel passt zu nachfolgenden Stiftleisten:

DF19G-14P-1H, DF19K-14P-1H, DF19L-14P-1H, DF19KR-14P-1H, DF19-14P-1V, GT100-14P-LS-SMT, CNT245-14221, CNT245-14211, HS89140, HS90300, IP100-C14O-C15, 20268-014E, P24013P14, MSB24013P140HA,

ES&S Solutions GmbH
Gewerbering 2
41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0
Fax: +49 (0)2162-266-18-88
E-Mail: info@esskabel.de

www.esskabel.de

Disclaimer: In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

MSB24013P14A, 20230-014B-F, 20230-T14-F, 20230-W14B-F, 107A14-0021RA-G3-R, 20268-014E-12E, CP100-S14G-H16

Diese Kabel passt zu folgenden LCD's:

HT10X21-331, HT12X21, CTLM104-01-L02, HX104X01-200, HX104X01-201, LTM09C362T, LTD104EA5S, LTM07C382J-V02, LVM104XSB-01, NL192108AC18-02D



ES&S Solutions GmbH
Gewerbering 2
41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0
Fax: +49 (0)2162-266-18-88
E-Mail: info@esskabel.de

www.esskabel.de

Disclaimer: In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

BILDER

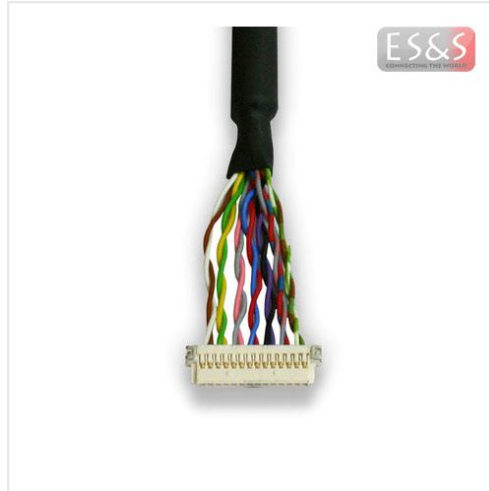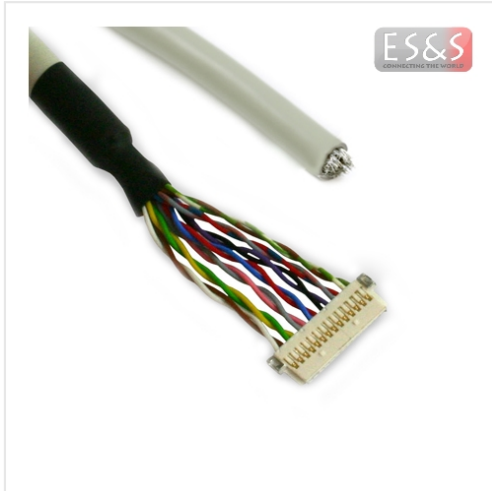

ES&S Solutions GmbH
Gewerbering 2
41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0
Fax: +49 (0)2162-266-18-88
E-Mail: info@esskabel.de

www.esskabel.de

Disclaimer: In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support