

DATENBLATT

KAB-FI-X30H-0500RK



ES&S Solutions GmbH
Gewerbering 2
41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0
Fax: +49 (0)2162-266-18-88
E-Mail: info@esskabel.de

www.esskabel.de

Disclaimer: In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

BESCHREIBUNG

Dieser Kabelsatz bietet Ihnen die Möglichkeit, schnell und einfach eine Verbindung zwischen einem Display mit einem STM Steckverbinder P2407P30 oder WELL 1058-H-30P-HF(kompatibel mit FI-X Serie) und einem beliebigen Grafikboardsteckverbinder herzustellen. Wir liefern Ihnen ein Twisted Pair Rundkabel mit 30 montierten Kontakten und einem passenden Leergehäuse, die zweite Seite des Kabels ist unbearbeitet. Sie können dann ganz einfach nach Ihren Kabelplänen die Kontakte in die entsprechenden Gehäusekammern bestücken und so eine optimale Funktion und Zuweisung der Paare zu den Signalstrukturen erzielen. Dieses Kabel ist besonders für Muster und Kleinstserien geeignet.

TECHNISCHE DATEN:

- Seite 1: STM-P2407P30 oder WELL-1058-H-30P-HF (kompatibel zu FI-X30H) mit montierten Kontakten
2407PS-00 oder WELL-1058-G-P-E, ungesteckt
- Seite 2: unbearbeitet
- Rundleitung, twisted pair, AWG28, abgeschirmt,
- [UL iQ™2560](#)
- Temperaturbereich: -20 °C bis 60 °C
- Gewicht : 44,1 g

VORTEILE AUF EINEN BLICK:

- individuell bestückbar
- andere Längen lieferbar
- abgeschirmt
- mit Twisted Pair
- für LVDS und DVI geeignet
- **dieses Kabel wird ungesteckt mit beiliegender Buchse angeliefert! (Siehe Abb. 3 und 4)**

Die Konfektionierung dieser Leitung sowie die Herstellung des gesamten anschlussfertigen Kabels bieten wir Ihnen gerne auch als Mustermenge an. Bitte kontaktieren Sie uns. Wir machen Ihnen gerne ein unverbindliches Angebot.

Dieses Kabel passt zu nachfolgenden Stiftleisten:

FI-XB30SRL-HF11, FI-X30S-HF-NPB, A1006-WR-S-30P, CNTH243A30123, CNT243A3011, CNT243C3011, MDF76K-30S-1H, GT101-30S-H16, 915-001-1008R, 093G30-B0001A, IP100-C30B-C15, IS100-C30B-C15, HS100-L30N-

ES&S Solutions GmbH
Gewerbering 2
41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0
Fax: +49 (0)2162-266-18-88
E-Mail: info@esskabel.de

www.esskabel.de

Disclaimer: In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

N23, 093G30-B0001A, 093F30, MSCK2407P30B, GT101-30S-HR11, GS23302-0311R, MSCKT2407P30HB, AL230F-A0G1D-P, WF13-422-3033, 187098-30091, CI1406SL00-NH, 187114-30091, SM30B-LD-YGS-10, WL 1058-H, JS-1267-30

Folgende Displays werden unterstützt:

G215HVN01.0, M156BGE-L10, B141PW01, B150XG02, B170UW02, IAQS80, IAQS80F, IAQX10, IAQX10M, LB064V02, LB064V02, LB064V02-A1, LB104V03, LB104V03-A1, LB104V3, LC230W02, LC230W02-A5K1, LC230WX3, LC260WX2, LC300W01-A3, LC300W01-A5, LC320W01, LC370W01-A5, LC370WX1, LC420W02, LC420W02-AK, LC420WX5, LC550W01, LM170E01, LM170E01-A5, LM170E01-LTA1, LM170E02, LM170E03, LM171W02, LM181E06-A4M1/D4, LM190E01-C4, LM190E02-A4, LM190E03, LM190E03-B4, LM190E05, LM190E05-SL02/03, LM190E06, LM190E08, LM190E3-B4K1, LM190WX1, LM201U02-A3M1, LM201U03-A3, LM201U04, LM201U04-A3, LM201U05, LM201W01, LM201WE03, LM201WE2, LM220WE1, LM260WU1, LM300W01-A3, LM300WQ3, LP133WX1, LP133WX2, LP141WX1, LP141WX3, LP150E05/E06, LP150X08, LP150X09, LP154W01, LP154WP1, LP154WX4, LP171WP4, LQ190E1LX31, LQ201U1LW21, LQ255T3LZ19, LQ315T3LZ28, LQ315T3LZ49, LTM170E6-L04, LTM170EU, LTM170EU-L01, LTM170EU-L21, LTM170EU-L31, LTM190E1, LTM190E1-L01/L03, LTM190E4-L01, LTM190EX, LTM190EX-L01, LTM190M2, LTM213U6, LTM213U6-L01, LTM240M1, LTM240M2, LTM300M1, M170EG01, M170EN05, M190PW01V0, M201UN02, M201UN03V0, N150P2-L04, N150P3-L04, N150U3, N150X4-L01, N150X4-L14, NL128102BC29-01, NL128102BM29-05A, NL12810BC29-10, NL10276BC24-19D, UMSH-8013MD, UMSH-8013-1T, UMSH-8013MD-2T, T104X1D2, T200XW02, T315XW02, T460HW01, TX43D55VM0BAA, TX43D57VC0CAA, TX54D13VC0CAA, TX80D17VC0CAC, LQ190E1LW01, LQ190E1LW41, T260XW01VM, D420WXN, C370WXN, LC320WXN, LK315T3LA31, LK315T3LA33, LK315T3LA51, LK315T3LA53, LK315T3LA57, LK315T3LZ93, LK315T3LZ94, LTM170ET01, G170EG01, M190A1-L0A, G104X1-L01, AM-1024600BTMQW, G220SW01, G185XW01, HV150UX1, LQ070Y3LG4A, LM230WF3-SLB1, LM215WF3-SLA1, LQ121S1LG71, LB121S03-TL03, G104X1-L04, G104X1-L03, HSD190MEN5, LC170WXN, LTM230HT05, G190EG01-V1, LB070WV8-SL01, LD101WX1, M170EGE-L20, P270HVN01.0, M215HGE.L21, LM270WF5, DLF_DLH1975, FG100451DSSWNG01, G156BGE-L01, LB070WV8, M236HJK-L5B, G170EG01V1, LD101WX1-SL01, TCG070WVLRPCGD118, AM1024600L2TMQW-01H, LQ156M3LW01, NL192108AC18-02D, LQ156M3LW01, G156BGE-L01, IDK-2121W, G150XTN06.1_rev1.0, LQ156M3LW01, G240HW01, AM-1280800J3TZQW-00, AM-800480D2TMQW-TA0H, G104XV01.0, OT104EXWDLV-H1, OT104KXWDLV-00, G121EAN01.0, G121EAN01.1, G121EAN01.2, G121I1-L01, OT121ABWDLT-03, OT121ABWDLV-H0, OT121ZBWDLV-00, LQ121K1LG59, G150XTN06.1, G151EVN01.0, G156HAN02.1, G156XTN01.0, G156XTT01.1, G156XW01 V1, G156XW01 V3, OT156CBWDLT-00, LQ156M3LW01, G170EG01 V1, G170ETN02.0, LB170E01-SL01, G173HW01 V0, G185HAN01.0, G185XW01 V0, G185XW01 V1, M185XTN01.2, G190EAN01.0, G190EAN01.1, G190EAN01.2, G190EG01 V1, G190EG02 V1, G190ETN01, G190SF01 V0, M190PW01 V8, LB190E02-SL02, LB190E02-SL03, LB190E02-SL04, LQ190E1LW52, LQ190E1LW72, LQ190E1LX75, LQ190N1LW01, G220SVN01.0, G230HAN01.1, LM230WF3-SLD1, G238HAN01.0, G238HAN01.1, G238HAN01.2, LM238WF1-SLE1, G240HW01 V0, G240HW01 V1, LM240WU8-SLE1, LM240WUA-SSA1, LM270WF5-SLN2, CLAA104XA02CW, CLAA104XA01CW, CLAA104XA12BW, TM070RDSG12, G156XTT01 V1, G185XW01 V201, G150XV01.1, G185XW01 V2,

ES&S Solutions GmbH
Gewerbering 2
41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0
Fax: +49 (0)2162-266-18-88
E-Mail: info@esskabel.de

www.esskabel.de

Disclaimer: In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

VGG107603-0TMLWD, VGG107603-0TMLWC, VGG128005-0TMLWB, VGG107606-6UFLWA, VGG137601-2UFLWA, G185BGE-L01, M238HCJ-L31, G215HVN01.0, AM-1024768FTMQW-05H, AM-1024600L3TMQW-01H, AM-1280800J3TZQW-00, G215HAN01.2, M200HJJ-L20, LM238WF1-SLK1, M230HCJ-L3N, G260JJE-L07, M220ZGE-L20, G238HAN01.3, P270HVN01.1, G215HAN01.201, P215HAN02.0, G156BGE-L03, R190EFE-L51, R236HFE-L30, M195FGE-L20, M215HJJ-L30, G170ETN02.1, LQ156T3LW03, M280HKJ-L30, G190EAN01.5, M200HJJ-L20, LM238WF1-SLK1, G190EAN01.3, G121ICE-L02, G121ICE-L01, M236HJJ-L31, G185HAN01.1, R190EFE-L62, V580HJ1-LE6, M230HCJ-L3N, LQ190E1LX75T, G215HAN01.2, NL12880AC16-01D, G238HAN01.3, G260JJE-L07, G156BGE-L03, MI210UT-1, NL10276AC30-53D, NL128102AC29-17, LM215WFA, G240HW01V1

Folgende Boards werden unterstützt:

NUC5I5MYBE INTEL NUC BOARD

Steckverbinder baugleich mit:

FI-X30SSL-HF, FI-X30C2L, WL 1058-HL, MDF76-30P-1C, IS100-L30O-C23, 187034-30091, FCI10061851, MSBK2407P30, A1001HS0-30P, DS100-230-H23, DS100-330-H23, DS100-430-H23, JS-1266



ES&S Solutions GmbH
Gewerbering 2
41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0
Fax: +49 (0)2162-266-18-88
E-Mail: info@esskabel.de

www.esskabel.de

Disclaimer: In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

BILDER

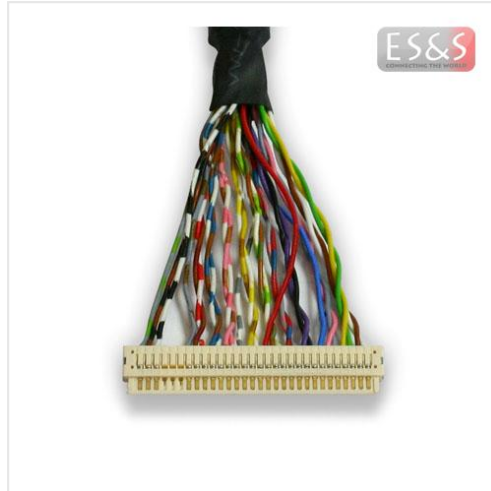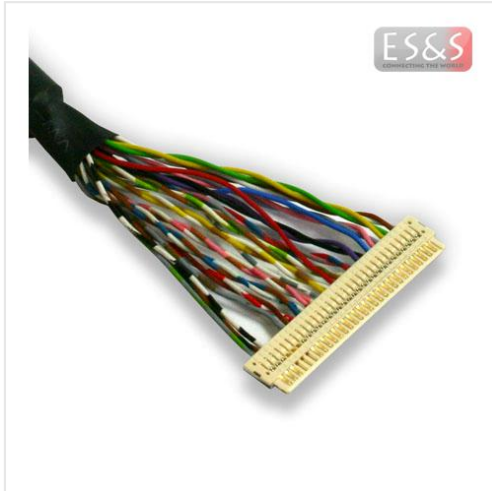

ES&S Solutions GmbH
Gewerbering 2
41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0
Fax: +49 (0)2162-266-18-88
E-Mail: info@esskabel.de

www.esskabel.de

Disclaimer: In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support