

DATENBLATT

KAB-I-PEX-20345-040T-0100-1:1-FLAT



ES&S Solutions GmbH
Gewerbering 2
41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0
Fax: +49 (0)2162-266-18-88
E-Mail: info@esskabel.de

www.esskabel.de

BESCHREIBUNG

I-PEX CABLINE V series grid 0.4 mm, cable designed for high speed LVDS applications especially for LCD display drives.

TECHNICAL SPECIFICATIONS:

- side 1: [20345-040T](#), pitch = 0.40mm
- side 2: [20345-040T](#), pitch = 0.40 mm
- micro coax cable flat laminated AWG40, L = 100 mm, 1:1 connection
- dimension: 100 (l) x 14.8 (w) x 1 (h) (in mm)
- operating temperature: -20 °C to 85 °C
- weight: 5 g

FEATURES:

- standard cable length L = 100 mm
- 40 pin. connector, pitch 0.40 mm, bidirectional
- extremely small design, counter part on PCB with max. installation height of 1.00 mm
- safe screening via metal frame
- mechanical detent to avoid vibrations and impacts
- the applied cable is a micro-coaxial AWG40
- customized solutions on request

Fits to pin header: UJU, ISO050-L40B-C10

Compatible board connectors: 20347-0xxE-xx available ex stock, our part no.

STE-I-PEX-20347-340E-12

Fits for displays: B101AW01 V1, B125XW01-V0, N156BGE-L21, B156HW01-V3, TVL-55682D101U-LW-I-AAN, G101EVN01.0, B173RW01_V3, B173RW01, B156HW01 V3, N156HGE-L11_V3.0, G101EVN03.1, G101EVN01.5, G101STN01.0, G101STN01.2, G101STN01.4, G101STN01.6, HV133WX1-100, MV238FHM-N10, HV133WX1-100


ES&S Solutions GmbH
Gewerbering 2
41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0
Fax: +49 (0)2162-266-18-88
E-Mail: info@esskabel.de

www.esskabel.de

Disclaimer: In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

BILDER

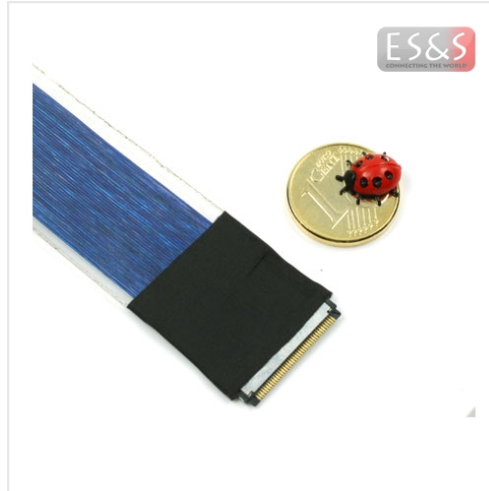

ES&S Solutions GmbH
 Gewerbering 2
 41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0
 Fax: +49 (0)2162-266-18-88
 E-Mail: info@esskabel.de

www.esskabel.de

Disclaimer: In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support