KAB-CI1406S00A-NH-0500LI

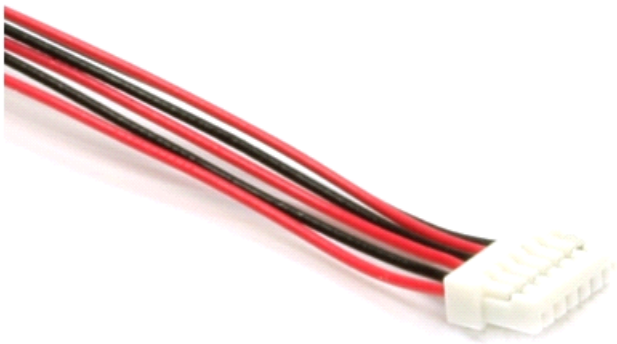

LED-Backlight cable with CviLux connector , 6 pin

ES&S Solutions GmbH · Gewerbering 2 · 41751 Viersen · GERMANY · www.esskabel.de
fon: +49 (0)2162 - 266 18 0 · fax: +49 (0)2162 - 266 18 88 · info@esskabel.de

Copyright© 2012

DISCLAIMER:
In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S´s devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S´s device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S´s device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S´s devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

1. Functional description

This wiring harness allows a quick and easy connection between a LED backlight display with a CviLux connector of the CI14 series and any other connector. We supply 6 strands with assembled socket housing. The second side of the cable is unprocessed. This cable is particularly suited for samples and small series.

Technical data:

- side 1: 6 pol. CI1406S00A-NH, R = 1.00 mm
- side 2: open circuited
- strands red, black, AWG28, UL1571X
- l = 500 mm

Advantages:

- available ex stock
- customer specific assembly
- deliverable in different lengths on short notice

We also offer the assembly of this conductor as well as the complete cable ready-for-connection in small quantities. Please contact us for any information. We would be glad to submit you our offer without any obligation.

This cable fits for the following headers:
Entery 3707K-Q06N-01 or Chief Land 116B06-1000-M2-R

It supports the following displays and devices:

M240HW01, M185BGE-L10, M215HGE-L10

ES&S Solutions GmbH · Gewerbering 2 · 41751 Viersen · GERMANY · www.esskabel.de
fon: +49 (0)2162 - 266 18 0 · fax: +49 (0)2162 - 266 18 88 · info@esskabel.de

Copyright© 2012

DISCLAIMER:
In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S´s devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S´s device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S´s device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S´s devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

2. Pictures

3. Dimension

Size: 500.0 (l) (in mm)

4. Temperature ranges

Operating temperature: -20°C to 85°C

Storage temperature: -40°C to 85°C

5. Weight

Weight without packaging: 3.3 g

Weight with packaging: 5.0 g

Copyright© 2012

DISCLAIMER:
In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S´s devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S´s device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S´s device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S´s devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support