

ADA-LAN-PANEL



LAN / RJ45 - Adapter für die Gehäusemontage

DISCLAIMER:


In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

1. Functional description

The adapter ADA-LAN-PANEL is a board which adapts from RJ45 8/8 to a 10-pin HIROSE DF13 connector (DF13-10P-1.25(20)). It can be mounted to a chassis by screws (panel mounting).

- Suitable for connection with customer specific cables
- Suitable for connection with ES&S standard cables, e.g.:
KAB-DF13-10S-0500FK (500 mm flat cable, open ended)
KAB-ADA-LAN-0400 (site 1: DF13-10S, site 2: RJ-45 male)
- Mounting by clinch nut M3
- Screws, spacer and cables are not included
- RoHS compliant

2. Pictures

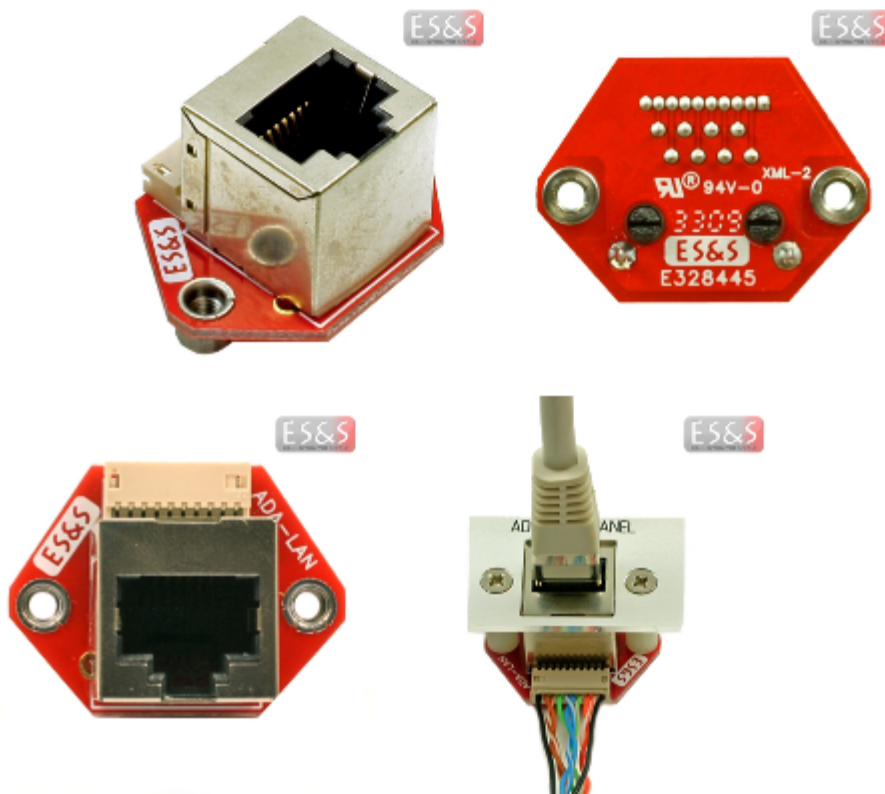

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support



3. Dimension

Size: 32.1 (l) x 24.2 (w) x 21.4 (h) (in mm)

4. Temperature ranges

Operating temperature: -20°C to 85°C

Storage temperature: -40°C to 85°C

5. Weight

Weight without packaging: 8.5 g

Weight with packaging: 10.4 g

6. How to install

Connecting the adapter must be done by the following assignment:

connection:

CN1	CN2
1	shield
2	8
3	7
4	6
5	5
6	4
7	3
8	2
9	1
10	shield

CN1: DF13-10P-1.25DSA



CN2: RJ45 8/8

Usually this adapter will be mounted in front- or backplanes. The following openings should be done:

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

ADA-LAN-PANEL REV1

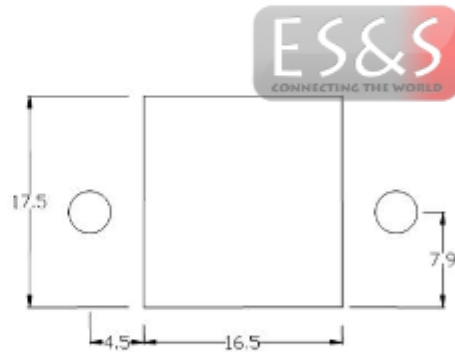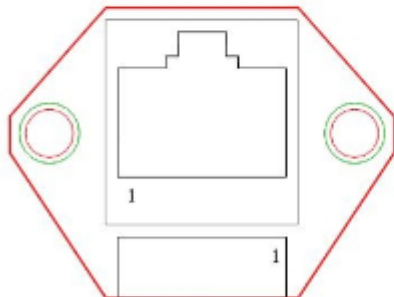

Frontplattenausschnitt



Einbautiefe:

bei flächenbündigem Einbau:
 Schrauben M3x20
 Abstandhalter: 16mm - Materialstarke Frontplatte

Bei anderer Einbaumethode sind die Schrauben und Abstandhalter entsprechend anzupassen.

This is only meant as a guess. Please check yourself carefully.

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support