



DATASHEET
KAB-IP67-V2-USB-A-F-USB-A-M-1000RK

KAB-IP67-V2-USB-A-F-USB-A-M-1000RK



Edelstahl IP67-USB Typ A Buchse/Kabel

ES&S Solutions GmbH · Gewerbering 2 · 41751 Viersen · GERMANY · www.esskabel.de
fon: +49 (0)2162 - 266 18 0 · fax: +49 (0)2162 - 266 18 88 · info@esskabel.de

REV: 1.00 1/4
Copyright© 2014

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

KAB-IP67-V2-USB-A-F-USB-A-M-1000RK

DATASHEET



DATASHEET

KAB-IP67-V2-USB-A-F-USB-A-M-1000RK

1. Funktionale Beschreibung

USB (Typ A) female Buchse mit Schutzklasse IP67 in einer Edelstahl Variante und einen 1000 mm langen Anschlusskabel. Hier sollte insbesondere das Edelstahlmaterial 1.4301 erwähnt werden das sich hervorragend für starke Beanspruchung in Medizin- und Lebensmittelindustrie eignet. Die spezielle Verschlusskappe mit der letztendlich die IP67 Norm erreicht wird, hat wie sonst üblich keine Ecken und Befestigungsschrauben wo sich Schmutzreste absetzen können.

Technische Daten:

- Seite 1: IP67 USB Typ A female, mit Spezial Kappe
- Seite 2: USB-A male
- USB 2.0 Kabel, grau, L = 1000 mm
- UL 2725
- Spezial Kappe unverlierbar, mit Buchsenkörper verbunden
- Kappendurchmesser = 27.3 mm
- Panel-Loch-Größe: 21 mm
- von hinten mit selbstschneidener Mutter verschraubbar
- Edelstahl Typ 1.4301
- für Frontplatten bis 8 mm

Dieses Kabel ist weiterhin in den Längen von 500 mm bis 5000 mm erhältlich. Unsere Artikelbezeichnungen sind:

KAB-IP67-V2-USB-A-F-USB-A-M-0500RK

KAB-IP67-V2-USB-A-F-USB-A-M-2000RK

KAB-IP67-V2-USB-A-F-USB-A-M-3000RK

KAB-IP67-V2-USB-A-F-USB-A-M-5000RK

Es sind weitere IP67-Lösungen jederzeit verfü- und konfektionierbar. Sprechen Sie mit uns über die speziellen Notwendigkeiten Ihrer Applikation. Wir unterbreiten Ihnen jederzeit gerne ein individuelles Angebot.

Weiteres Zubehör finden Sie unter der Kategorie IP67 Zubehör.

ES&S Solutions GmbH · Gewerbering 2 · 41751 Viersen · GERMANY · www.esskabel.de
fon: +49 (0)2162 - 266 18 0 · fax: +49 (0)2162 - 266 18 88 · info@esskabel.de

REV: 1.00 2/4
Copyright© 2014

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

KAB-IP67-V2-USB-A-F-USB-A-M-1000RK

DATASHEET

2. Bilder



3. Abmessung

Größe: 500,0 (L) (in mm)

4. Temperaturbereiche

Betriebstemperatur: -20°C bis 85°C

Lagertemperatur: -40°C bis 85°C

5. Gewicht


Gewicht ohne Verpackung: 112,0 g

Gewicht mit Verpackung: 140,0 g

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

6. Maße

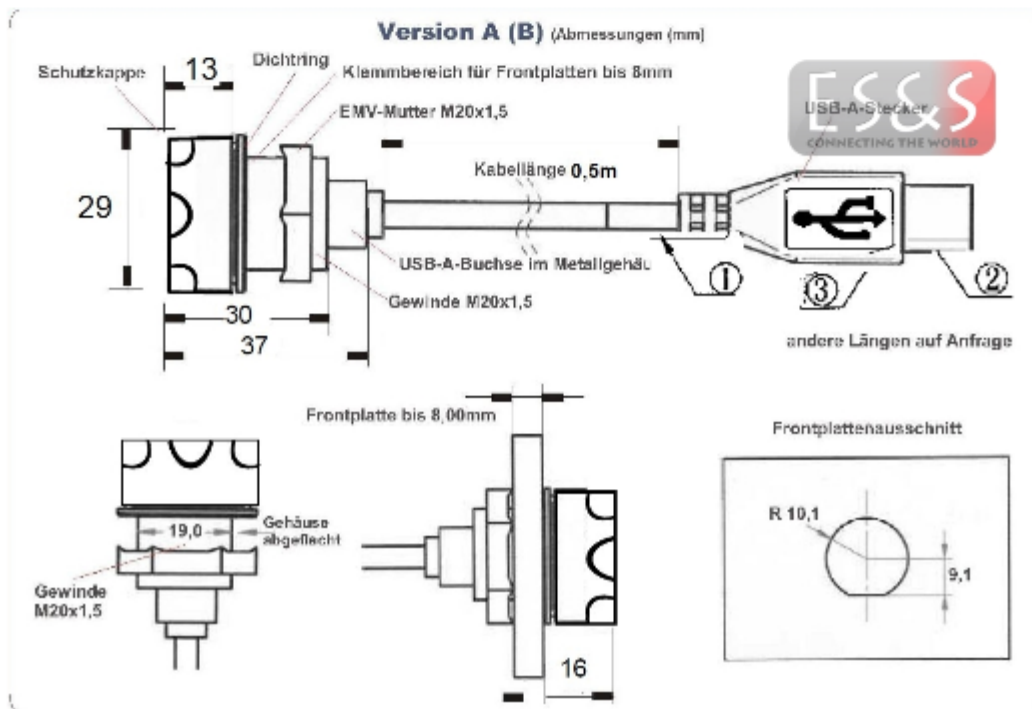

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support