

## **KAB-IP67-V2-USB-A-F-USB-A-M-1000RK**



Stainless steel IP67-USB type A female/cable

**DISCLAIMER:**

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

## 1. Functional description

USB (type A) female housing with protection class IP67 in a high quality steel version and with an USB connection cable of 1000 mm length. We would like to point out the stainless steel 1.4301 which is excellently suitable for high-stress applications in the medical and food industries.

Technical data:

- Side 1: IP67 USB typ A female, with special dustcover
- Side 2: USB A male
- USB 2.0 cable, grey, L = 1000 mm
- captive cap, mounted with female connector body
- Cap diameter = 27.3mm
- Panel-hole size 21 mm
- Mountable with self-cutting nut from the backside
- Stainless steel type 1.4301

This cable is in different lengths (from 500 mm til 5000 mm) available: Unsere Artikelbezeichnungen dazu sind:

KAB-IP67-V2-USB-A-F-USB-A-M-0500RK

KAB-IP67-V2-USB-A-F-USB-A-M-2000RK

KAB-IP67-V2-USB-A-F-USB-A-M-3000RK

KAB-IP67-V2-USB-A-F-USB-A-M-5000RK

Further IP67 solutions are available or can be assembled at any time. Please contact us as to the requirements of your specific applications. We would be pleased to submit you a customized offer.

You will find auxiliary equipment under the category IP67 accessories.

**DISCLAIMER:**

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

## 2. Pictures



## 3. Dimension

Size: 500.0 (l) (in mm)

## 4. Temperature ranges

Operating temperature: -20°C to 85°C

Storage temperature: -40°C to 85°C

## 5. Weight


Weight without packaging: 112.0 g

Weight with packaging: 140.0 g

**DISCLAIMER:**

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

## 6. Dimensions

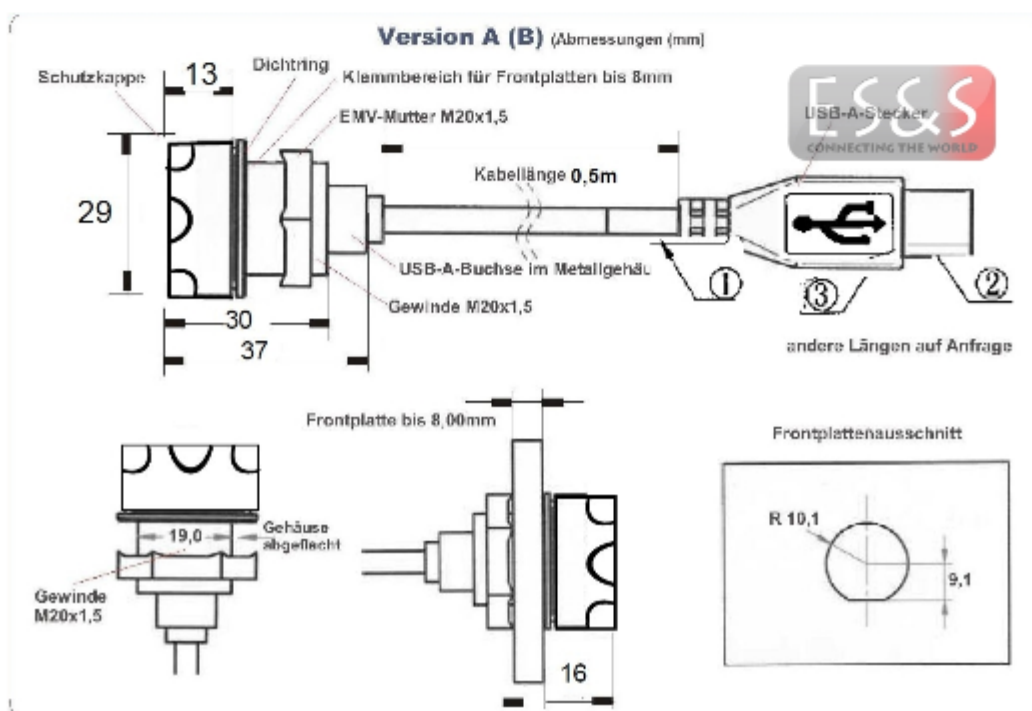

**DISCLAIMER:**

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support