KAB-FX15S-NNP-C-0500RK

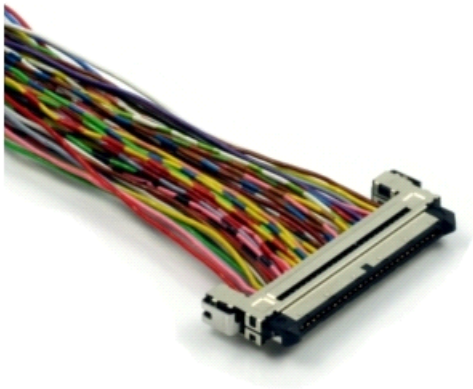

LVDS Kabel

ES&S Solutions GmbH · Gewerbering 2 · 41751 Viersen · GERMANY · www.esskabel.de
fon: +49 (0)2162 - 266 18 0 · fax: +49 (0)2162 - 266 18 88 · info@esskabel.de

Copyright© 2012

DISCLAIMER:
In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S´s devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S´s device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S´s device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S´s devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

1. Funktionale Beschreibung

Dieser Kabelsatz bietet Ihnen die Möglichkeit, schnell und einfach eine Verbindung zwischen einem Display oder anderen Geräten mit einem Steckverbinder der HIROSE FX15 Serie und einem beliebigen Grafikboardsteckverbinder herzustellen. Wir liefern Ihnen ein Twisted Pair Rundkabel mit montierten Kontakten und einem passenden, verriegelbarem Leergehäuse. Die zweite Seite des Kabels ist unbearbeitet. Sie können dann ganz einfach nach Ihren Kabelplänen die Kontakte in die entsprechenden Gehäusekammern bestücken und so eine optimale Funktion und Zuweisung der Paare zu den Signalstrukturen erzielen. Dieses Kabel ist besonders für Muster und Kleinstserien geeignet.

Vorteile auf einen Blick:

- verriegelbar
- Muster innerhalb 1 Woche lieferbar
- individuell bestückbar
- andere Längen kurzfristig lieferbar
- abgeschirmt
- mit Twisted Pair
- für LVDS und DVI geeignet
- dieses Kabel wird ungesteckt mit beiligender Buchse ausgeliefert!

Die Artikelnummer setzt sich folgendermaßen zusammen:

KAB-FX15S-NNP-LLLLRK
KAB -> Kabelkonfektion
FX15S -> Steckverbinderserie
NNP -> Polzahl, z.B. 51 pol.
LLLL -> Länge, z.B. 0500 = 500 mm, 0750 = 750 mm
RK -> Rundkabel geschirmt LI -> Einzellitze ungeschirmt

Die Konfektionierung dieser Leitung sowie die Herstellung des gesamten anschlussfertigen Kabels bieten wir Ihnen gerne auch als Mustermenge an. Bitte kontaktieren Sie uns. Wir machen Ihnen gerne ein unverbindliches Angebot.

Copyright© 2012

DISCLAIMER:
In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S´s devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S´s device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S´s device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S´s devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

Nachfolgende Buchsengehäuse können verarbeitet werden:
FX15S-21P-C
FX15S-31P-C
FX15S-41P-C
FX15S-51P-C

Dieses Kabel paßt zu nachfolgenden Stiftleisten:
FX15S-21S-0.5SH
FX15S-31S-0.5SH
FX15S-41S-0.5SH
FX15S-51S-0.5SH

Folgende Crimpkontakte können verwendet werden :
FX15-3032-PCFA
FX15-3032-PCFB
FX15-2830PCFB

Folgende Displays oder Geräte werden unterstützt:
Kyocera LED Printhead
TB-OP-LVDS

ES&S Solutions GmbH · Gewerbering 2 · 41751 Viersen · GERMANY · www.esskabel.de
fon: +49 (0)2162 - 266 18 0 · fax: +49 (0)2162 - 266 18 88 · info@esskabel.de

Copyright© 2012

DISCLAIMER:
In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S´s devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S´s device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S´s device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S´s devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

2. Bilder



3. Temperaturbereiche

Betriebstemperatur: -20°C bis 85°C

Lagertemperatur: -40°C bis 85°C

ES&S Solutions GmbH · Gewerbering 2 · 41751 Viersen · GERMANY · www.esskabel.de
fon: +49 (0)2162 - 266 18 0 · fax: +49 (0)2162 - 266 18 88 · info@esskabel.de

Copyright© 2012

DISCLAIMER:
In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S´s devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S´s device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S´s device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S´s devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support