


◆ SPECIFICATION

DESCRIPTION	UL20624 - 16N × 100mm * 1.25p * (4/4 , 8/22) * (0.1*0.8) * P7F * RoHS compliant		
KRT PART NO.		DRAWING NO.	

► CABLE TYPE (PATTERN : 7F)

► CABLE DIMENSION [unit : mm]

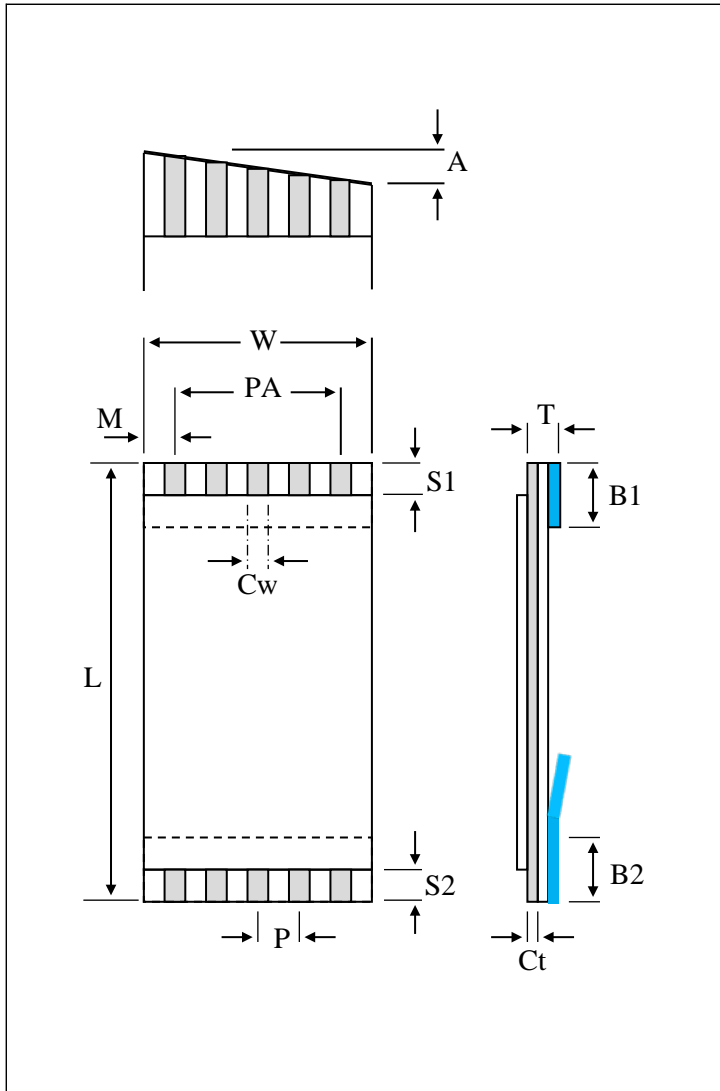

DESCRIPTION	Abbr	Dimension	Tolerance
PITCH	P	1.25	± 0.10
NO. OF CONDUCTOR	N	16	-
CABLE LENGTH	L	100	±2.0
STRIP LENGTH	S1	4	± 1.0
	S2	4	± 1.0
S/T LENGTH	B1	8	± 2.0
	B2	22	± 3.0
INSERT THICK	T	0.3	± 0.05
WIDTH	W	21.25	± 0.15
SPAN	PA	18.75	± 0.15
MARGIN	M	1.25	± 0.15
CONDUCTOR THICK	Ct	0.10	± 0.005
CONDUCTOR WIDTH	Cw	0.80	± 0.03
LESS THAN	A	0.5	-
PLATED	PL	tin 1 _μ m ↑	

◎ REMARK

B2 : 14mm is fixed.