

## **KAB-IP67-VM-USB-A-F-USB-A-M- 0500RK**



USB (Typ A) female Buchse in Vollmetall mit Schutzklasse IP67 an USB Type A male Stecker

**ES&S Solutions GmbH** · Gewerbering 2 · 41751 Viersen · GERMANY · [www.esskabel.de](http://www.esskabel.de)  
fon: +49 (0)2162 - 266 18 0 · fax: +49 (0)2162 - 266 18 88 · [info@esskabel.de](mailto:info@esskabel.de)

REV: 1.00 1/5  
Copyright© 2014

**DISCLAIMER:**

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

## 1. Funktionale Beschreibung

USB (Typ A) female mit Schutzklasse IP67 in Vollmetall und einem 500 mm langen Anschlusskabel an USB Type A male ohne Schutzklasse (normaler PC-Typ). Bestens geeignet zur Nutzung als Verlängerung in industriellen Anwendungen.

Technische Daten:

- Seite 1: IP67 USB Typ A female inkl. Mutter und Dichtung M20x1,5 mm, vorne verschraubbar mit Kappe in Vollmetall farblos eloxiert
- Seite 2: USB Typ A male
- USB 2.0 Kabel, geschirmt in grau
- Länge 500 mm
- UL2725

Es sind weitere IP67-Lösungen jederzeit verfü- und konfektionierbar. Sprechen Sie mit uns über die speziellen Notwendigkeiten Ihrer Applikation. Wir unterbreiten Ihnen jederzeit gerne ein individuelles Angebot.

Diese Version ist in weiteren Längen oder auch in schwarz eloxiert erhältlich:

- KAB-IP67-VM-USB-A-F-USB-A-M-0200RK = 200 mm
- KAB-IP67-VM-USB-A-F-USB-A-M-1000RK = 1000 mm
- KAB-IP67-VM-USB-A-F-USB-A-M-1300RK = 1300 mm
- KAB-IP67-VM-USB-A-F-USB-A-M-2000RK = 2000 mm
- KAB-IP67-VM-USB-A-F-USB-A-M-3000RK = 3000 mm
- KAB-IP67-VM-USB-A-F-USB-A-M-5000RK = 5000 mm

Schwarz eloxiert auf Anfrage!

Weiteres Zubehör wie die passende Verschlusskappe finden Sie unter der Kategorie IP67 Zubehör.

**DISCLAIMER:**

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

## 2. Bilder




**DISCLAIMER:**

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

### 3. Abmessung

Größe: 500,0 (L) (in mm)

#### USB - Einbaubuchse IP67 Version A und B

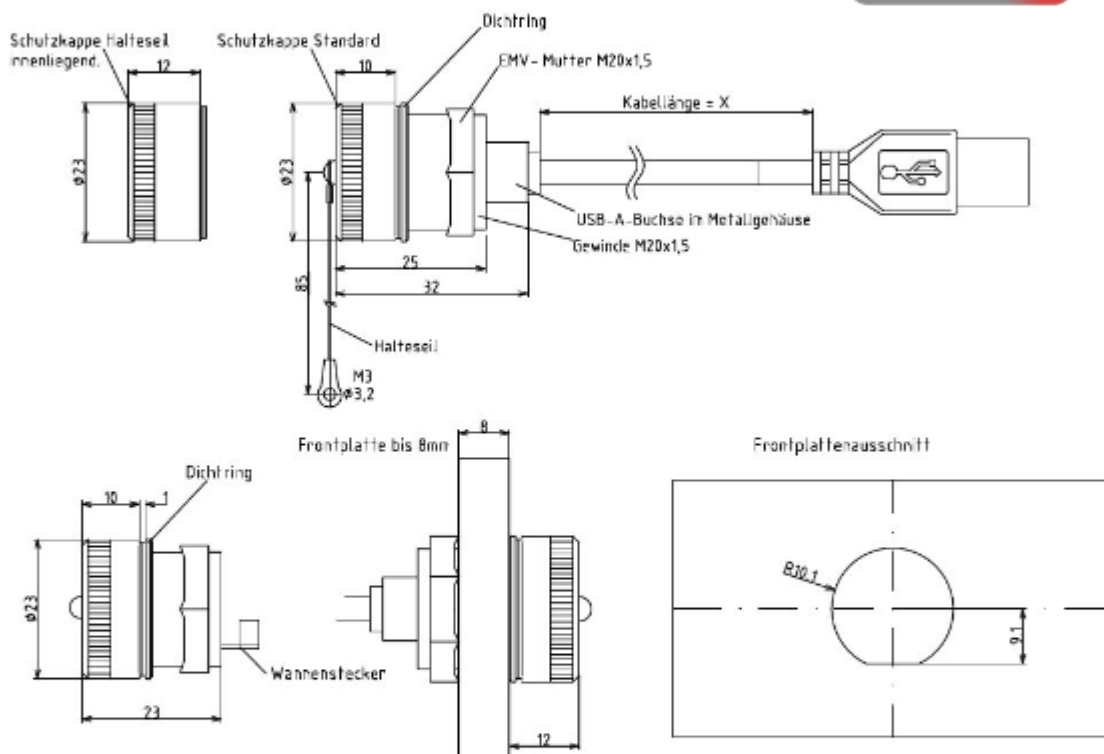

### 4. Temperaturbereiche

Betriebstemperatur: -20°C bis 85°C

Lagertemperatur: -40°C bis 85°C

**DISCLAIMER:**

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support



DATASHEET

# KAB-IP67-VM-USB-A-F-USB-A-M-0500R K

## 5. Gewicht

Gewicht ohne Verpackung: ? g

Gewicht mit Verpackung: ? g

Das Gewicht ist u.a. von der Länge des Kabels abhängig

KAB-IP67-VM-USB-A-F-USB-A-M-0500RK

ES&S Solutions GmbH · Gewerbering 2 · 41751 Viersen · GERMANY · [www.esskabel.de](http://www.esskabel.de)  
fon: +49 (0)2162 - 266 18 0 · fax: +49 (0)2162 - 266 18 88 · [info@esskabel.de](mailto:info@esskabel.de)

REV: 1.00 5/5  
Copyright© 2014

**DISCLAIMER:**

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

DATASHEET