

KAB-IP67-VM-USB-A-F-USB-A-M- 0500RK



USB (type A) female connector with protection class IP67 and a connection cable to an USB
type A male

ES&S Solutions GmbH · Gewerbering 2 · 41751 Viersen · GERMANY · www.esskabel.de
fon: +49 (0)2162 - 266 18 0 · fax: +49 (0)2162 - 266 18 88 · info@esskabel.de

REV: 1.00 1/5
Copyright© 2014

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

1. Functional description

USB (type A) female connector with protection class IP67 and a connection cable of 500 mm length to an USB type A male without protection class (common type of PC).

Technical data:

- side 1: IP67 USB type A female metal version including nut and gasket M20x1,5 mm, screwable to front with full-metal dustcover, natural anodized
- side 2: USB type A male
- USB 2.0 cable, shielded in grey
- length 500 mm
- UL2725

There are other IP67-solutions available. Please let us know the special characteristics of your application requirements. We are always happy to submit you our individual quotation.

This version is also available in various lengths:

- KAB-IP67-VM-USB-A-F-USB-A-M-0200RK = 200 mm
- KAB-IP67-VM-USB-A-F-USB-A-M-1000RK = 1000 mm
- KAB-IP67-VM-USB-A-F-USB-A-M-1300RK = 1300 mm
- KAB-IP67-VM-USB-A-F-USB-A-M-2000RK = 2000 mm
- KAB-IP67-VM-USB-A-F-USB-A-M-3000RK = 3000 mm
- KAB-IP67-VM-USB-A-F-USB-A-M-5000RK = 5000 mm

Black anodized upon request!

You will find auxiliary equipment as the suitable dustcover under the category IP67 accessories.

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

2. Pictures




DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

3. Dimension

Size: 500.0 (l) (in mm)

USB - Einbaubuchse IP67 Version A und B

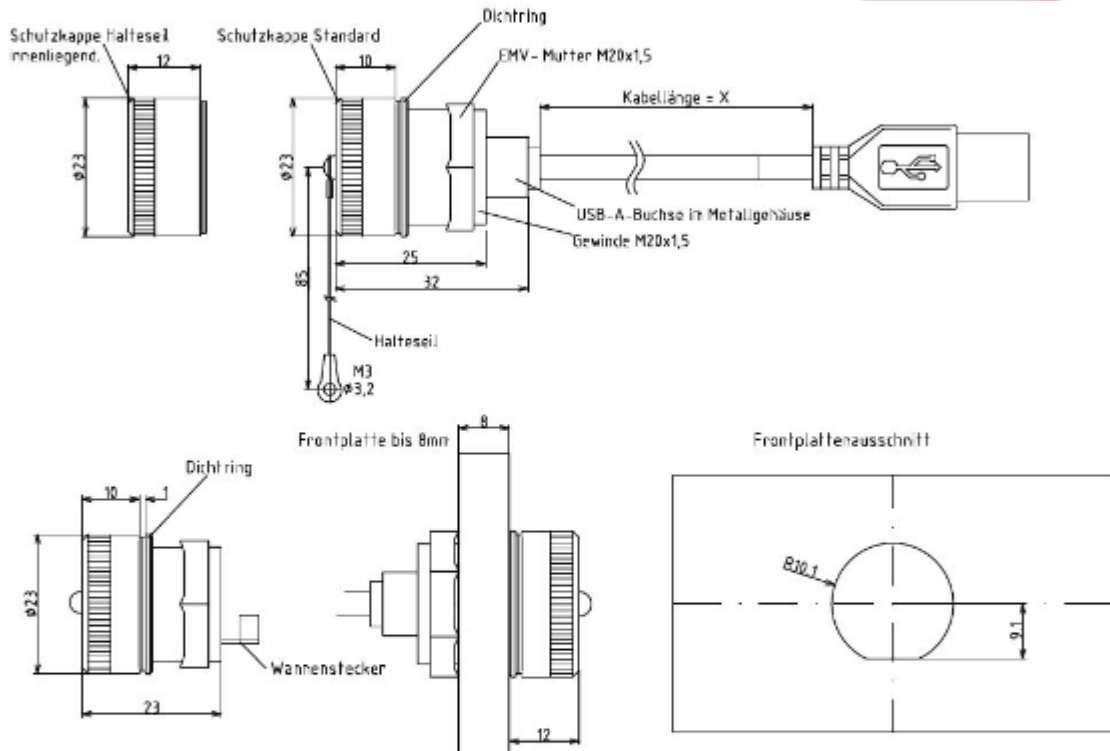

4. Temperature ranges

Operating temperature: -20°C to 85°C

Storage temperature: -40°C to 85°C

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support



DATASHEET

KAB-IP67-VM-USB-A-F-USB-A-M-0500R K

5. Weight

Weight without packaging: ? g

Weight with packaging: ? g

The weight depends on the length of the cable

KAB-IP67-VM-USB-A-F-USB-A-M-0500RK

ES&S Solutions GmbH · Gewerbering 2 · 41751 Viersen · GERMANY · www.esskabel.de
fon: +49 (0)2162 - 266 18 0 · fax: +49 (0)2162 - 266 18 88 · info@esskabel.de

REV: 1.00 5/5
Copyright© 2014

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

DATASHEET