


		Pin Assignment														
CONN.1		1	2	3	4	5	~	~	~	~	~	26	27	28	29	30
CONN.2		1	2	3	4	5	~	~	~	~	~	26	27	28	29	30
SIGNAL																
A.W.G		42	42	42	42	42	42	42	42	42	42	42	42	42	42	42
Remark																

CN1

(KEL)
USL20-30S
0.4PITCH

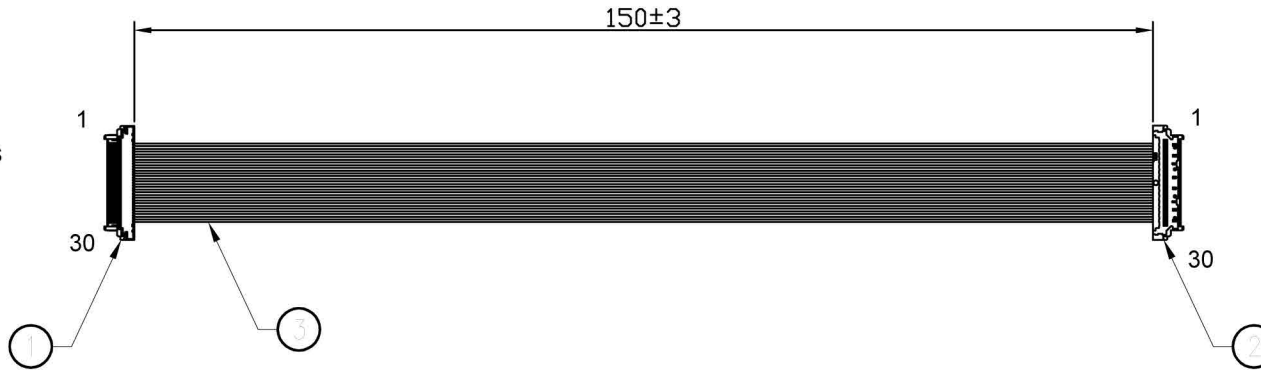

CN2

(KEL)
USL20-30S
0.4PITCH

NOTES

- (1) Withstand
 - 1. Withstand voltage: AC200 V
 - 2. Cut-off current: 1mA
 - 3. Withstand time: 0.5sec/point
- (2) Insulation
 - 1. Insulation voltage: DC250 V
 - 2. Insulation resistance: 100MΩ
 - 3. Insulation time: 1.0 sec/point



Unit : mm(inch)

NO.	Component	Quantity	Port name	Maker	Remark
3	Cable	30	YH10005-42AWG	YEONHAB or comparable	Color: 銅線 or 鍍銀
2	Connector	1	USL20-30SS	KEL	
1	Connector	1	USL20-30SS	KEL	

△					
△					
REV. DATE.	APPROVED BY	DRAWN BY	DESCRIPTION		
THIRD ANGLE PROJECTION	DRAWN BY	DATE	CHECKED BY	DATE	APPROVED BY
MATERIAL	CONTACT OIL	GENERAL TOLERANCE		ES&S	
FINISH	TITLE	DRAWING No.		SHEET	REVISION
	USL20-30SS-015-B	P20995		1/1	B