


◆ SPECIFICATION

DESCRIPTION	UL2896 - 15N × 200mm * 1.0p * (4/4 , 7/7) * (0,05*0,65) * P7		
	DRAWING NO.		

► CABLE TYPE (PATTERN : 7)

► CABLE DIMENSION [unit : mm]

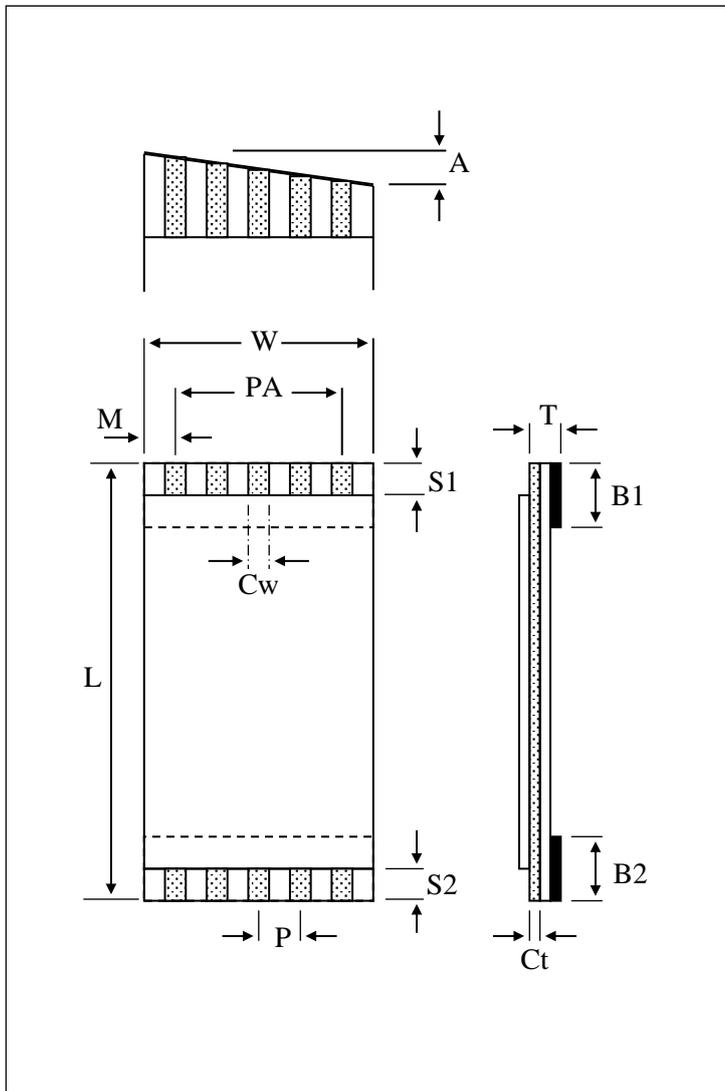

DESCRIPTION	Abbr	Dimension	Tolerance
PITCH	P	1.0	± 0.10
NO. OF CONDUCTOR	N	15	-
CABLE LENGTH	L	200	± 2.0
STRIP LENGTH	S1	4	± 1.0
	S2	4	± 1.0
S/T LENGTH	B1	7	± 1.5
	B2	7	± 1.5
INSERT THICK	T	0,3	± 0.05
WIDTH	W	10,00	± 0.2
SPAN	PA	8,00	± 0.20
MARGIN	M	1.0	± 0.15
CONDUCTOR THICK	Ct	0,050	± 0.01
CONDUCTOR WIDTH	Cw	0,65	± 0.03
LESS THAN	A	0,5	-
PLATED	PL	1,μm ↑	

◎ REMARK

FFC1.00A15-0192L-4-4-07-07

Data input

STYLE	N	TL	P	S1	S2	B1	B2	Ct	Cw	pattern
UL2896	15	200	1,00	4	4	7	7	0,05	0,65	7