


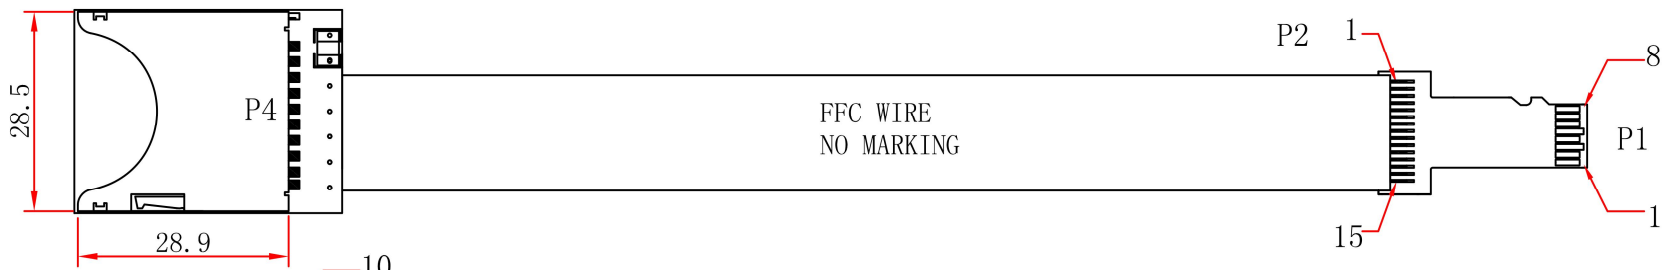


REV	Content	Date
A1		2013.07.26

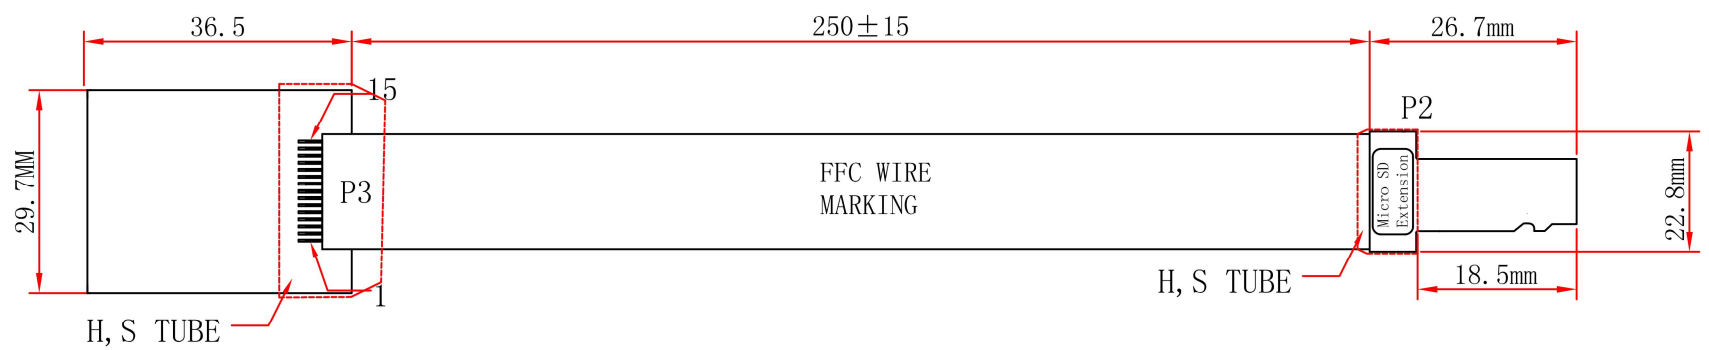

NOTE:
 1: ALL CABLES ARE 100% TESTED: ANY OPEN, MISWIRING & SHORT ARE NOT PERMITTED.
 Withstanding voltage: DC 300V AT 10ms.
 Insulation resistance: 5M Ohm (min).
 Conductive resistance: 5 Ohm max.
 2: ALL MATERIAL MUST BE RoHS COMPLIANCE.
 3: PACKAGE EACH CABLE IN A PE BAG.
 4: Carton Size: 15.5*15.5*10.5'

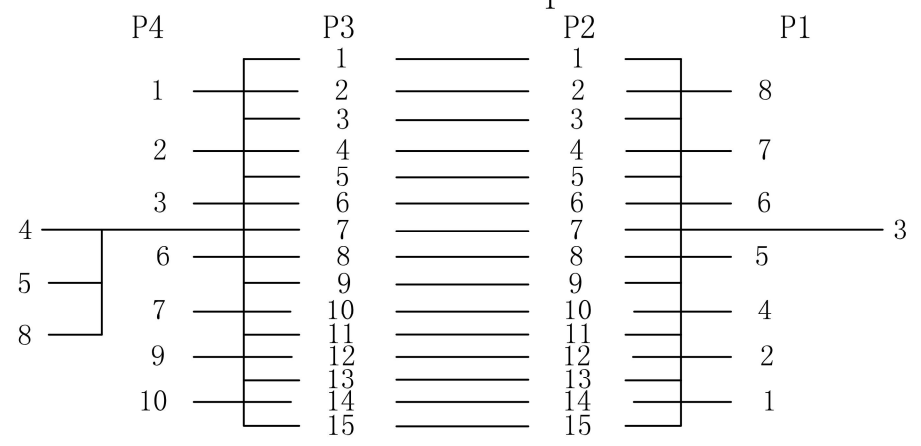

Approved		ES&S Part No. ADA-SD-MICRO-SD-0250FFC		Cable Length Unless Other Spec. Tolerances:		
Checked	zilin			0 ~ 200mm ± 10mm	201 ~ 1000mm ± 20mm	1001 ~ 1500mm ± 25mm
Drawing	Jack	Drawing NO:	Q03008	Date:	26-Jul-2013	
Sheet	1/1	Description:	Micro SD-SD F		Unit:	mm
Customer:		Customer P/N:				