


导体P数	N	40P
间距(Pitch)	PH	0.5±0.05
全间距(Total Pitch)	SP	19.5±0.07
总长度(Total Length)	TL	50±2
绝缘胶长(Insulator Length)	IL	43±2
边缘宽度(Margin Width)	M	0.5±0.07
总宽度(Total Width)	W	22.5±0.08
线口长度(Strip Length)	S1	3.5±0.5
线口长度(Strip Length)	S2	3.5±0.5
补强板长(Stiffener)	B1	5±1
补强板长(Stiffener)	B2	5±1
线口倾斜(Strip Slant)	A1	≤0.30
冲孔模斜(Punch Slant)	A2	/
接插端厚度(Terminal Thickness)	T	0.3±0.03
线身厚度(Cable Thickness)	ST	0.12±0.03

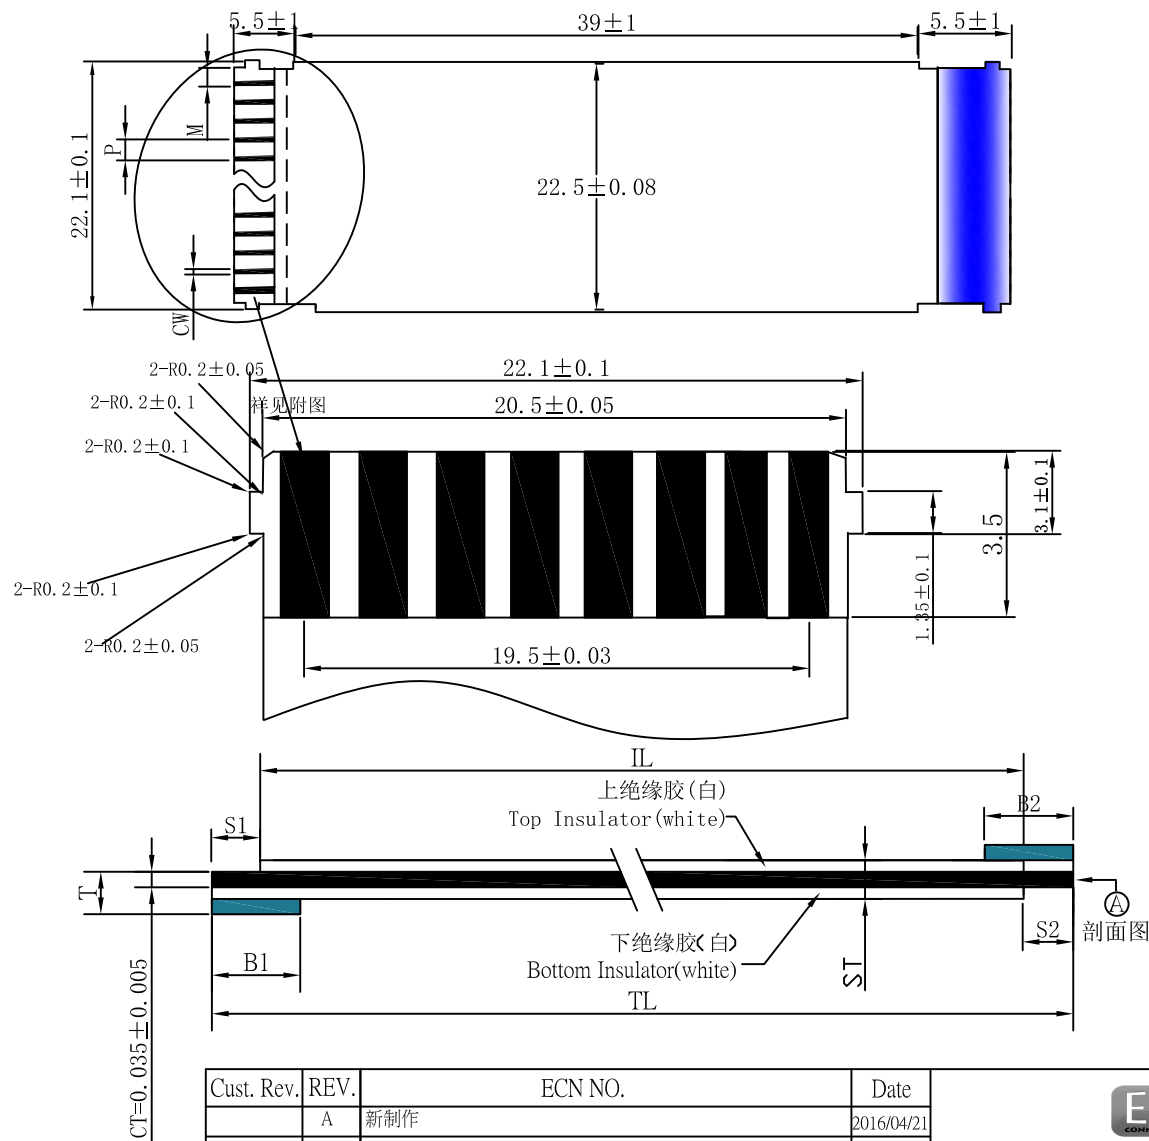

without imprint on cable

规格 (Spec.)	0.5x40P×50×B×(3.5/3.5 5/5)×(0.035X0.3)×(0.043±0.043)		
5			
4	补强板 (Supporting Tape)	0.225(蓝 blue)	C1U2GX-006 01X
3	下绝缘胶 (Bottom Insulator)	0.043(白 white)	CBW2XL-12001A
2	上绝缘胶 (Top Insulator)	0.043(白 white)	CBW25L-12001A
1	导体 (Conductor)	0.035x0.3(裸铜镀金) copper with gold plated	M011LX-065 01A
ITEM	DESCRIPTION	SPECIFICATION	REMARK
COMPONENT PARTS LIST			

Cust. Rev.	REV.	ECN NO.	Date	ES&S CONNECTING THE WORLD	
	A	新制作	2016/04/21	核准(Approved by):	比例(Scale): /
客户名称(Cust. Name): ES&S			FFC0.50D40-0044L-3-3-05-05-SC-FH52	审核(Checked by):	名称(Name): FFC
客户料号(Cust. P/N):			图纸编号(Dwg. No.):	制作(Prepared by): 韩丽玲	日期(Date): 2016/04/21 单位(Unit): mm