


NOTE:

1. Electrical test:
 - (1). 100% open short & miss wire test;
 - (2). Insulation resistance: DC 300V 10M ohm;
 - (3). Contactor resistance: 3 ohm;
2. HD-TV TEST, 3840*2160@60HZ
3. RoHS2.0 COMPLIANT

PIN OUT

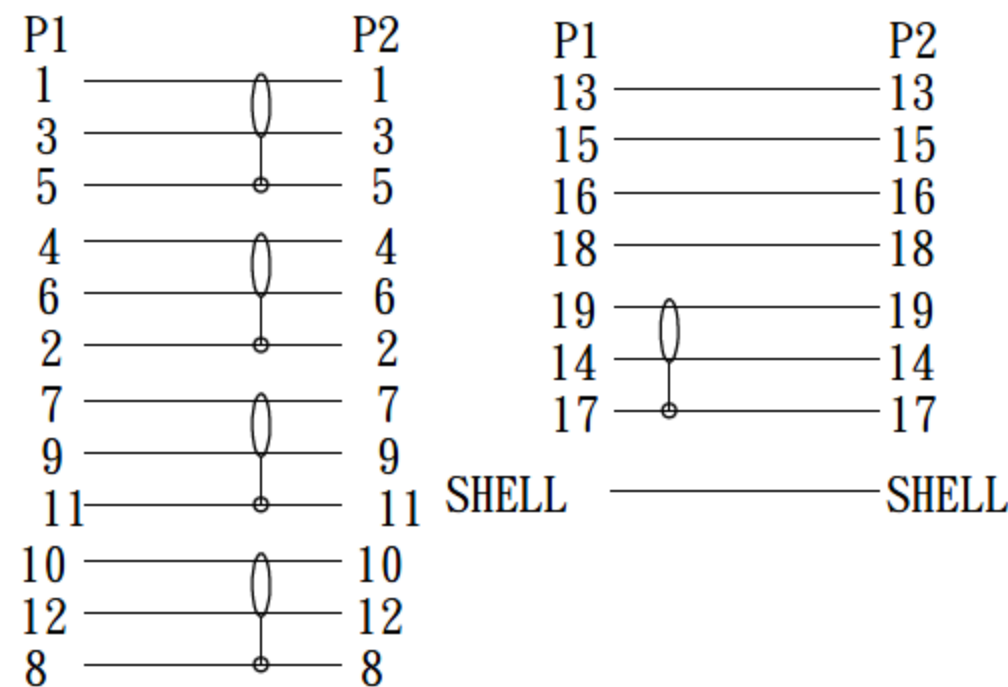

| | | | | |
|---|-------------|--|---|--|
| ⑦ | THUMB SCREW | #4-40*15 PLATED NICKEL | 2 | |
| ⑥ | THUMB SCREW | NUT-NICKEL PLATED#4-40 | 2 | |
| ⑤ | OUT MOLD | 45P BLACK PVC | 2 | |
| ④ | INTER MOLD | LDPE | 2 | |
| ③ | CONNECTOR | HDMI 19P A/M SOLDER, BLACK INSULATION , THE PIN GOLD PLATED , THE SEHLL FOR NICKEL PLATED , WITH BLACK JACKET | 1 | |
| ② | CONNECTOR | HDMI 19P A/F SOLDER, BLACK INSULATION , THE PIN GOLD PLATED , THE SEHLL FOR NICKEL PLATED | 1 | |
| ① | CABEL | (28 AWG TC*1P+28AWG TC+FAM))*5+(28AWG TC)*4C+AL-FOIL+DRAIN WIRE (1/32AWG BC)+BRAID 128 AL-MG , JACKET PVC/BLACK OD:7.3±0.2MM | 1 | |

| NO. | PARTS NAME | SPECIFICATION DESCRIPTION | QT' Y | REMARK | CUSTOMER | ITEM NO. | UNIT | MM |
|-----|------------|-------------------------------|--------------|--------|--------------|--|--------|--------------|
| | | | 2017. 02. 08 | A1 | PRODUCT NAME | HDMI 2.0 A Male to HDMI A Socket with flange cable | | |
| | | | 2016. 12. 23 | A | DRAWNBY | CHECKBY | APPOBY | DATE |
| BY | CHK | REVISION RECORD MODIFICATIONS | DATE | REV. | FERGUS | | | 2016. 12. 23 |