

JUMPER CABLE

Part Numbering System Using the CRIMPFLEX® Connector System

254 **PW** **14** **E** **0305** - **S1F2L**

LEFT END RIGHT END

Pitch

254 – 2.54 mm

Style


PW – Standard White Polyester

Number of Conductors

Conductor Size (Bare)

E – 0.076 mm x 1.57 mm

Length in mm (Measured from End to End)

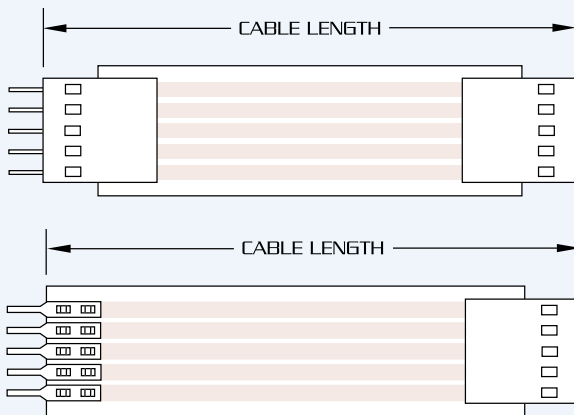

Connector Style (Tin Plating Standard)

Soldertab

S1 – Standard Soldertab, P/N 10241-12

S5 – Double Retention Soldertab,
P/N 12887-12

Female

*F1X – High Insertion Force Female Contact,
P/N 10025-12

*F2X – High Insertion Force Female Contact,
Selective gold plating, P/N 10025-32

*F3X – Low Insertion Force Female Contact,
P/N 11506-12

*F5X – Hi Flex Female Contact, P/N 14106-12

Male Pin

M1 – Short Square Male Pin, P/N 13595-12


*M3X – Long Square Male Pin, P/N 12410-12

*M4X – Long Square Male Pin, Selective gold
plating, P/N 12410-32

** Blue Indicates that housing style must
be specified, see below*

Housings - X

H – Standard Housing, P/N OF-XX



4 – Dual Row Housing, P/N 4F-XX



7 – Low Profile Housing, P/N 7F-XX



L – Latching Housing, P/N OL-XX



D – Detent Style Housing, P/N OD-XX



V – Latching Receptacle Housing, P/N 1L-XX



— Other Options are Available, Please Contact the Factory —