


USB3.1CF(Nickel Plated)
Black Molding,No:1683
TOL:±0.3
PIN ASSIGNMENT:

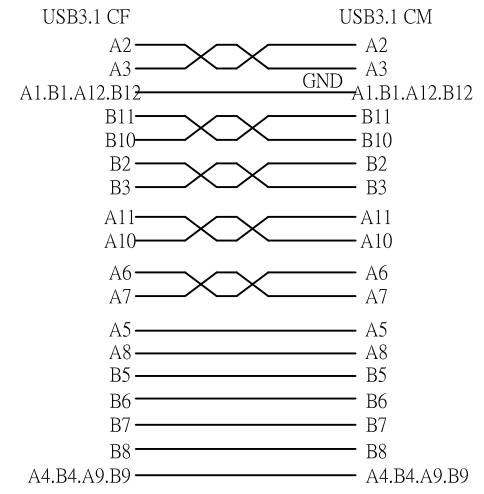


MAX 10GB,3A to Cable
GEN2
OPEN/SHORT TEST:100% TEST.
INSULATION: MIN. 5M.

KAB-USB3.1-CM-USB3.1-CF-PANEL-0150RK

⑦	Hex Nuts : #4-40(4.75*1.9mm)	2PCS
⑥	USB3.1 CF(Black Insulator,Nickel Plated),16PIN	1PCS
⑤	Copper foil	2PCS
④	PE	10g
③	Black 45P PVC	20g
②	USB3.1 CM Type(Black Insulator,Nickel Plated),16PIN	1PCS
①	UL-2725 1/0.2T*1P+AL+MY*4C+(1/0.16T*1P)*2C+1/0.2T*4C+41/0.08T*2C+D+AL OD=4.8MM Black PVC Jacket.	1PCS
No.	Description	Qty

Company		Goods Code		Draw	OYH	Date	2019.05.04
ITEM NO.	USB3-CM-CF-3FT-C	Drawing Evidence		Check		Date	
Goods NO.				Approval		Date	
Original NO.		Unit(mm)		Audit			



D		
C		
B		
VER. A	REVISE	Date