




Pin Assignment

CONN.1	1	2	3	4	5	~	~	~	~	~	36	37	38	39	40
CONN.2	1	2	3	4	5	~	~	~	~	~	36	37	38	39	40
SIGNAL															
A.W.G	42	42	42	42	42	42	42	42	42	42	42	42	42	42	42
Remark															

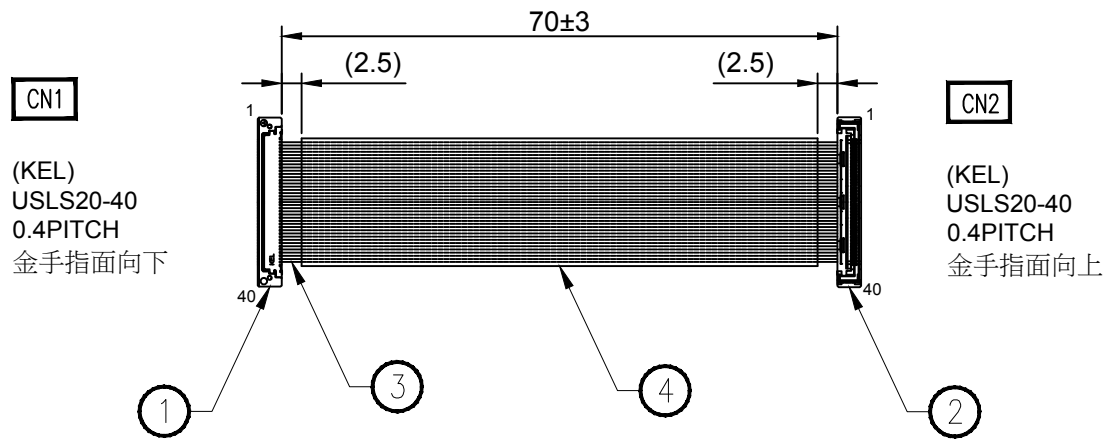

CN1

(KEL)
USLS20-40
0.4PITCH
金手指面向下

CN2

(KEL)
USLS20-40
0.4PITCH
金手指面向上

NOTES

- (1) Withstand
 - Withstand voltage: AC200 V
 - Cut-off current: 1mA
 - Withstand time: 0.5sec/point
- (2) Insulation
 - Insulation voltage: DC250 V
 - Insulation resistance: 100MΩ
 - Insulation time: 0.5 sec/point

2019.02.11
KEL



Unit : mm(inch)

NO.	Component	Quantity	Part name	Maker	Remark
4	Tape	2	耐溫膠帶	Comparable	Color: 綠色
3	Cable	40	Coaxial Cable 42AWG-PFA	Comparable	Color: 鍍銀 or 鍍鎳
2	Connector	1	USLS20-40	KEL	
1	Connector	1	USLS20-40	KEL	

REV DATE.	APPROVED BY	DRAWN BY	DESCRIPTION
2019.02.11	Dave	Andy	USLS20-40-007-BH
THIRD ANGLE PROJECTION	DRAWN BY	CHECKED BY	APPROVED BY
	Andy	Dave	Dave
MATERIAL	CONTACT OIL	GENERAL TOLERANCE	SCALE
		X: ±2.0 X: ±1.0 .XX ±0.5	1:1
FINISH	TITLE	DRAWING No.	SHEET
	USLS20-40-007-BH	P23633	1/1
			REVISION
			A