


Pin Assignment

CONN.1	1	2	3	4	5	~	~	~	~	~	36	37	38	39	40
CONN.2	1	2	3	4	5	~	~	~	~	~	36	37	38	39	40
SIGNAL															
A.W.G	42	42	42	42	42	42	42	42	42	42	42	42	42	42	42
Remark															

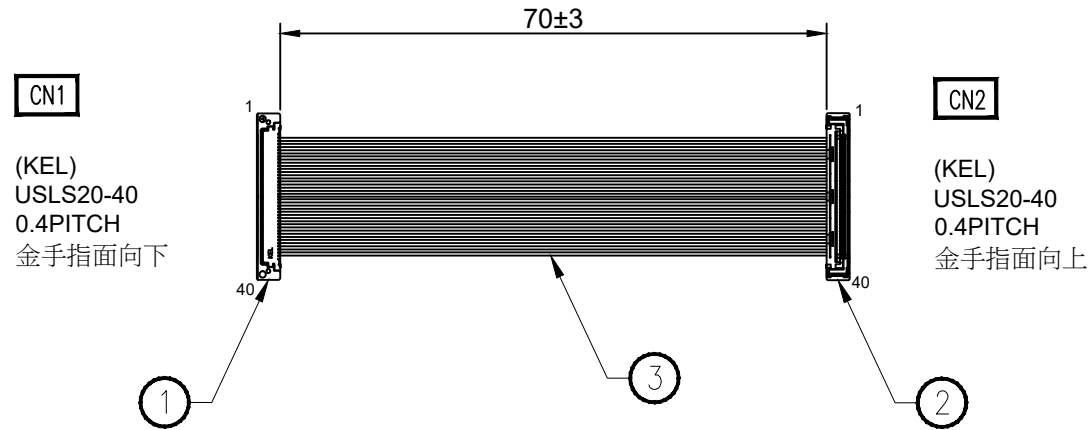

NOTES

- (1) Withstand
 1. Withstand voltage: AC200 V
 2. Cut-off current: 1mA
 3. Withstand time: 0.5sec/point
- (2) Insulation
 1. Insulation voltage: DC250 V
 2. Insulation resistance: 100MΩ
 3. Insulation time: 0.5 sec/point



Unit : mm(inch)

					△							
					△							
					REV DATE.		APPROVED BY		DRAWN BY		DESCRIPTION	
					THIRD ANGLE PROJECTION		DRAWN BY Andy 2019.04.10		CHECKED BY Dave 2019.04.10		APPROVED BY Dave 2019.04.10	
					MATERIAL		CONTACT OIL		GENERAL TOLERANCE		SCALE 1:1	
									x. ±2.0 x. ±1.0 x. ±2' xx±0.5 .x' ±1'			
					FINISH		TITLE		DRAWING No.		SHEET REVISION	
							USLS20-40-007-B		P23795		1/1 A	
NO.	Component	Quantity	Part name	Maker	Remark							
3	Cable	40	Coaxial Cable 42AWG-PFA	Comparable	Color: 鍍銀 or 鍍鎳							
2	Connector	1	USLS20-40	KEL								
1	Connector	1	USLS20-40	KEL								