



Drawing for reference

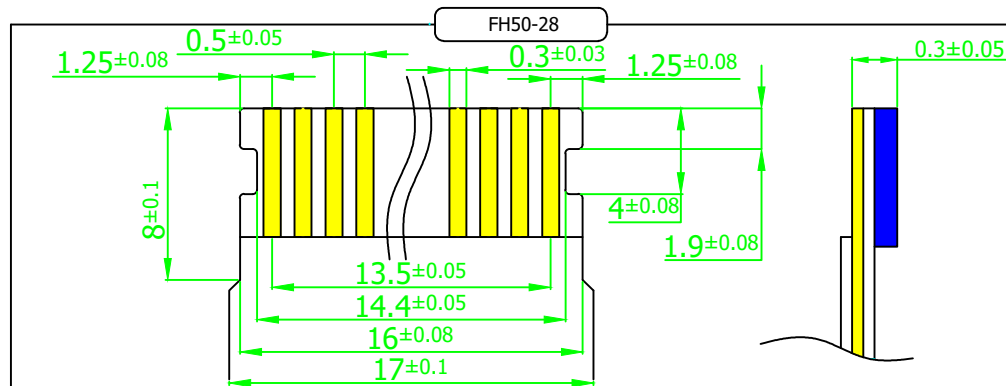

| FFC Specification | | |
|-------------------|--------------|-----------------------------|
| CONDUCTORS | Material | COPPER(AU≥0.05μm, Ni 1~3μm) |
| | Width | 300μm |
| | Thickness | 35μm |
| INSULATION | Material | PET/HOT MELT _ White |
| | Thickness | 60μm |
| | UL style No. | UL 20861 |
| SUPPORTING TAPE | Material | PET/HOT MELT _ BLUE |
| | Thickness | 220μm |

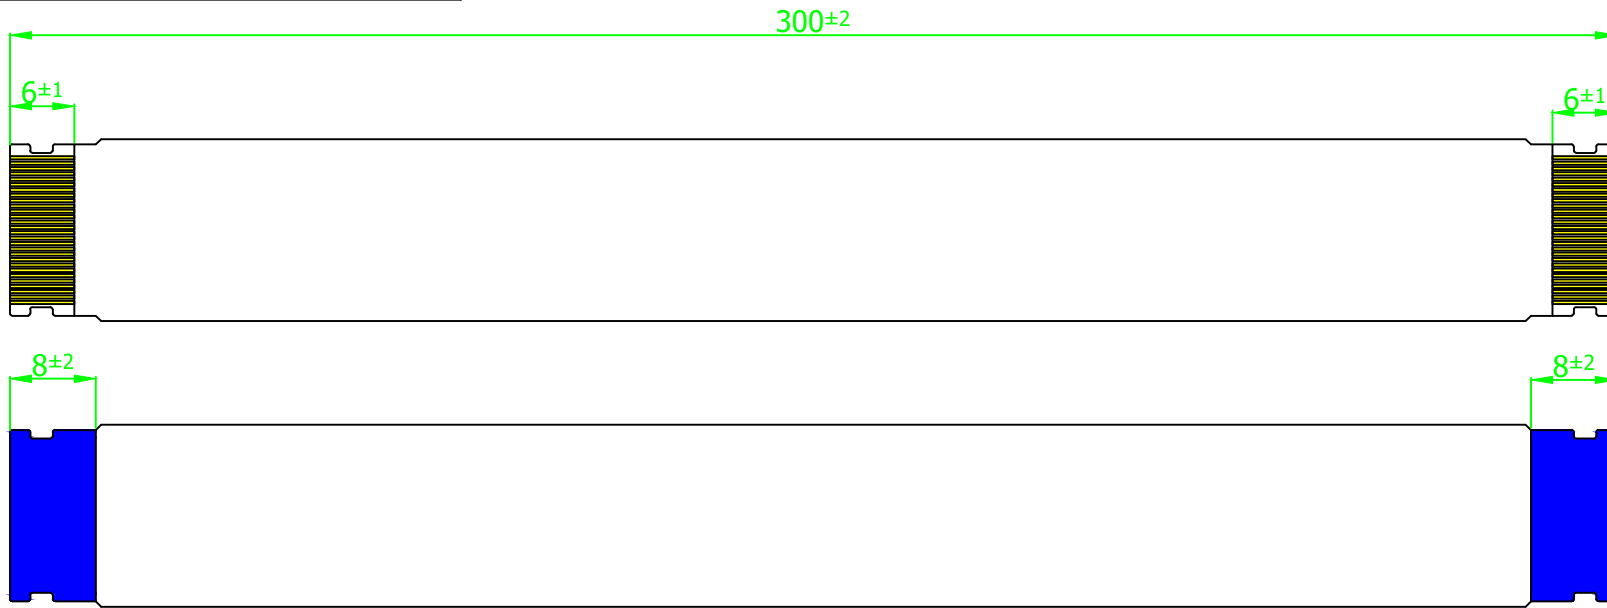

| | | | | | | | | | | |
|---------------|----------|-------------------------------|-------------|------|------|-------------|-------|--------|-------|----------|
| "P7" TYPE | CUSTOMER | PART NO. | DRAWING NO. | REV. | UNIT | DATE | MODEL | DESIGN | CHECK | APPROVAL |
| | ES&S | | D-200911 | 1 | mm | 2020.09.04. | | | | T.G.Koo |
| SPECIFICATION | | 28N x 300mm*0.5P*(6/6/8/8)*P7 | | | | | | | | |

FFC0.50A28-0288L-6-6-08-08-AU-FH50

| NO. | DESCRIPTION | DATE |
|-----------|-------------|------|
| REVISIONS | | |