


GP

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A		19/03/28	

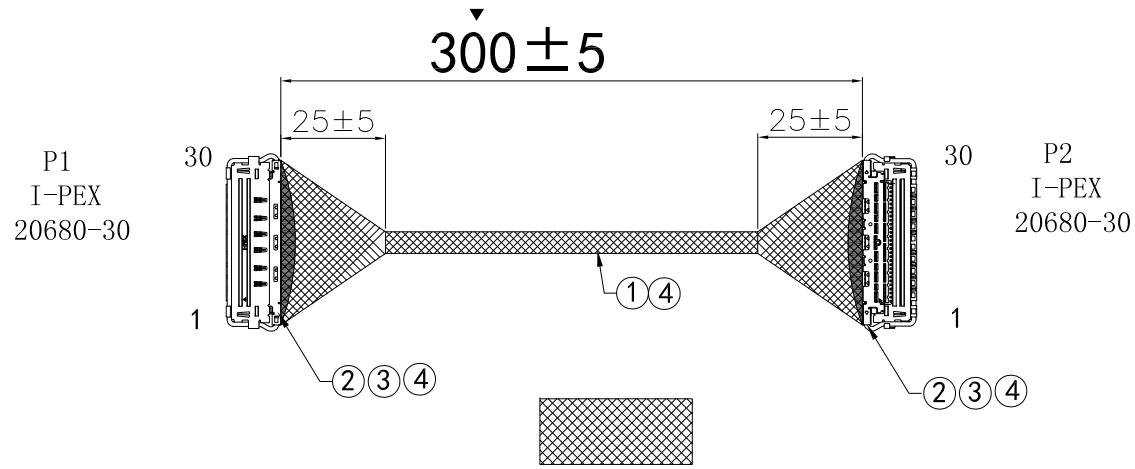


P1  
I-PEX  
20680-30

P2  
I-PEX  
20680-30

WIRE DIAGRAM			
P1	COLOR	P2	AWG
1	藍	1	40
2	藍	2	
3	藍	3	
4	藍	4	
5	藍	5	
6	藍	6	
7	藍	7	
8	藍	8	
9	藍	9	
10	藍	10	
11	藍	11	
12	藍	12	
13	藍	13	
14	藍	14	
15	藍	15	
16	藍	16	
17	藍	17	
18	藍	18	
19	藍	19	
20	藍	20	
21	藍	21	
22	藍	22	
23	藍	23	
24	藍	24	
25	藍	25	
26	藍	26	
27	藍	27	
28	藍	28	
29	藍	29	
30	藍	30	
31	铁壳	31	

- NOTES:
- 1.100% OPEN, SHORT & INTERMITANCE TEST.
  - 2.THE DIMENSIONS MARKED "x" SHALL BE CHECKED.
  - 3.ELECTRICAL CHARACTERISTICS
    - 3.1. CONDUCTOR RESISTANCE: 3.0 Ohms Max.
    - 3.2.INSULATION RESISTANCE:20M Ohms/200V DC,10ms.
  - 4.HARMFUL MATERIAL AND PERCESS CONTROL PLEASE FOLLOW ROHS.



**KAB-I-PEX-20679-030E-0300-1:1-ROUND**

NO.	TITLE	DESCRIPTION	QTY'	REMARK
5				
4		醋酸膠布 黑色 L=15MM		
3		UV GLUE	0.05	TBD
2		I-PEX P/N:20680-30 0.4PH	2	I-PEX
1		UL1354 40AWG WIRE 藍	30	AS

DRAWING BY:	2019/03/28
CHECKED BY:	
APPROVED BY:	

GENERAL TOLERANCES		
0-50	+/-1.5	ANGLE:
51-100	+/-2.0	±2°
101-	+/-3.0	
DIMENSION CLASSIFICATION		
<input checked="" type="checkbox"/> :CRITICAL	<input checked="" type="checkbox"/> :MAJOR	
<input type="checkbox"/> :MINOR	<input type="checkbox"/> :REFERENCE	
UNIT :	mm	REV: A



PART NO:	
DWG NO:	
TITLE:	LVDS CABLE
THIRD ANGLE PROJECTION	
SHEET 1 OF 1	

DO NOT SCALE DRAWING