


Metal machining parts surface to be free from toolmarks fling points and scratches no burrs or sharp edges allowed
 Material shown in the drawing are in line with <RoHS> requirements
 Before the identification mark "▲" symbol as the focus control size

REV	DESCRIPTION	DATE
A	Original Edition	2021/04/23

RoHS COMPLIANT

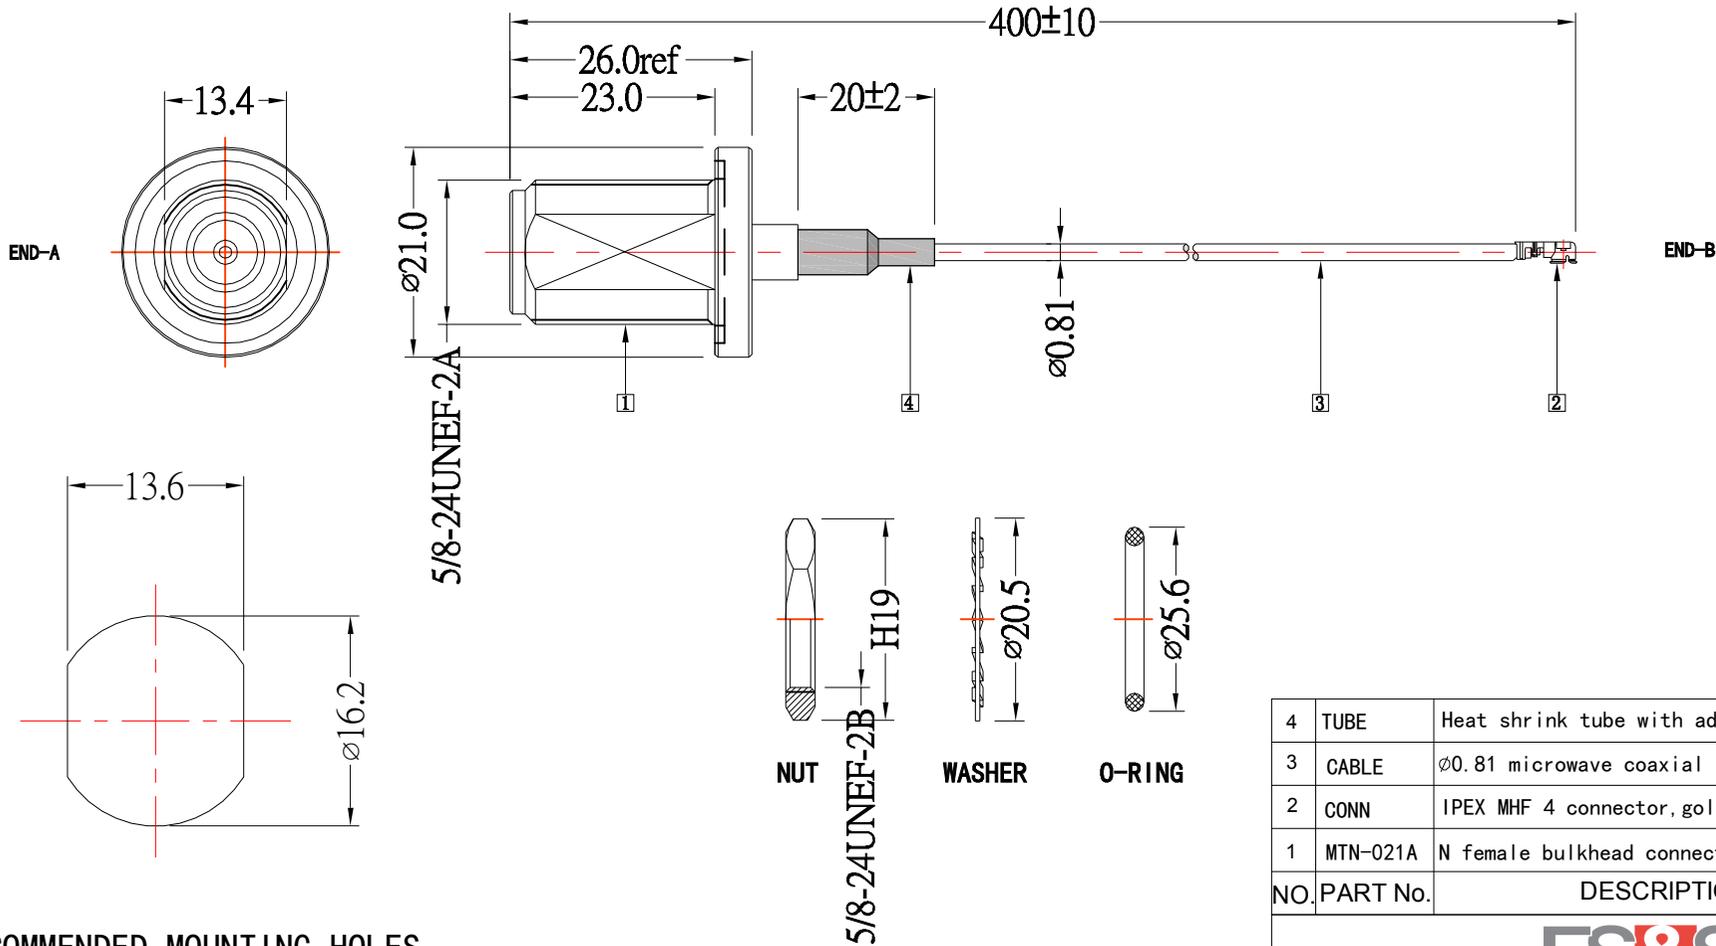

RECOMMENDED MOUNTING HOLES

Note:

1. Impedance: $50 \pm 2 \Omega$.
2. Operating frequency: DC 0 ~ 6GHz.
3. Voltage standing wave ratio: $\leq 2.0 @ 0 \sim 6\text{GHz}$.
4. Working voltage: 335V r.m.s @sea level.
5. Temperature range: $-35 \sim +75^\circ \text{C}$.
6. 100% open and short tested.

GENERAL TOLERANCES:

.X: ± 2.0

.XX: ± 1.5

ANGLE TOLERANCE: $\pm 2^\circ$

4	TUBE	Heat shrink tube with adhesive, color black,	
3	CABLE	$\varnothing 0.81$ microwave coaxial cable, color black, S-T	2
2	CONN	IPEX MHF 4 connector, gold plated, 50 Ω	1
1	MTN-021A	N female bulkhead connector, nickel plated, 50 Ω	1
NO.	PART No.	DESCRIPTION	Q'YT



Customer Code : TP009

Customer P/N : KAB-MHF-4-N-F-0400COAX

: MT01-1152

UNIT:mm		DRAWN:	ERIC	TITLE:
SCALE:/	A4	CHECK:		N female bulkhead to IPEX MHF 4 jumper
PAGE:1/1	REV.:A	APPRO:		