
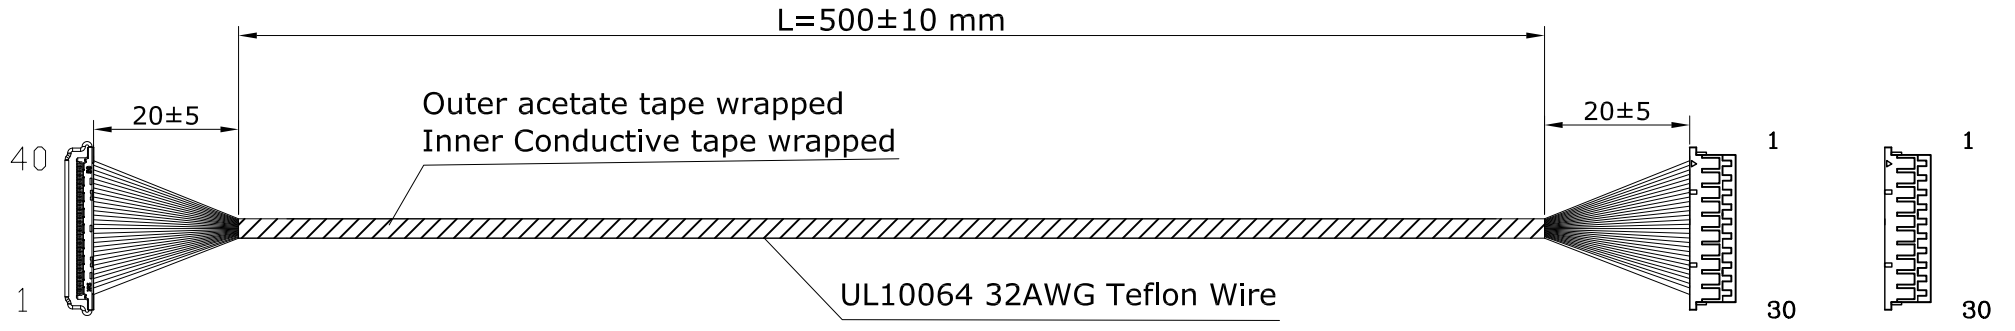
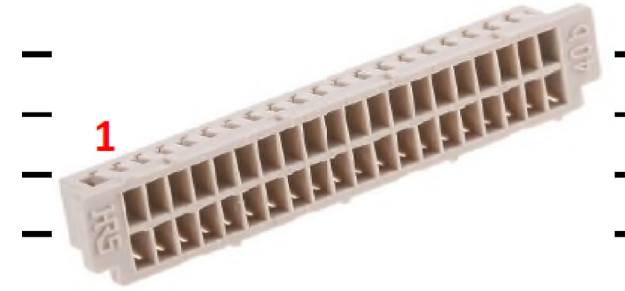


RoHS Compliant

HIROSE DF13-30DS-1.25C

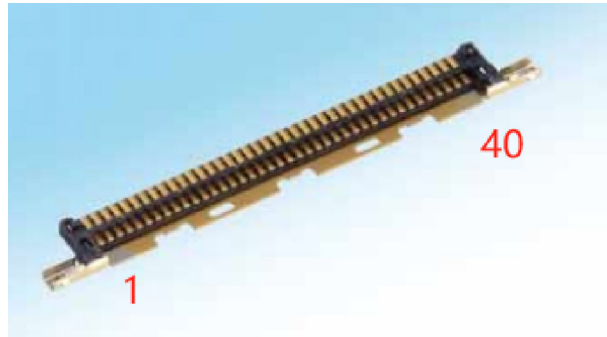

CN1: DF81D-40P-0.4SD

CN2: HIROSE DF13-30DS-1.25C
or Compatible

Pin define:

Twisted Twisted Twisted Twisted Twisted Twisted Twisted Twisted Twisted Twisted Twisted Twisted

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|---|---|----|---|----|----|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|
| CN 1 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | |
| CN 2 | 4 | 9 | 10 | 4 | 11 | 12 | 4 | 13 | 14 | 4 | 5 | 6 | 8 | 15 | 16 | 8 | 19 | 20 | 8 | 21 | 22 | 8 | 23 | 24 | 28 | 29 | 30 | 28 | 25 | 26 | 28 | | 28 | | 3 | 7 | 27 | | | | |

KAB-DF81D-40P-DF13-30DS-0500LI

Title: DF81D-40P-0.4SD + DF13-30DS Cable
L=500MM



| Item | Test condition | DO | |
|-----------------|---------------------|-----|----|
| | | YES | NO |
| Hip Test | AC=300V | V | |
| Insulation Test | DC=250V IR=20M ohmV | | |
| Conduction Test | 3 ohm | V | |
| NB Test | | | |

| RANGE | | TOLERANCE | | Part No. | |
|----------|----|-----------|------------|--------------|-------------------|
| OVER 101 | | ±2.5 | | Draw No. | |
| 51-100 | | ±2.0 | | CUS.Part No. | |
| 31-50 | | ±1.5 | | CUS.Rev. | A0 |
| 30 BELOW | | ±1.0 | | Approval | Check Designed |
| Units | MM | Scale | free | Steve | Tom Tom |
| Size | A4 | Date | 2023/10/05 | | |
| | | Sheet | | | |