


PIN ASSIGNMENT:

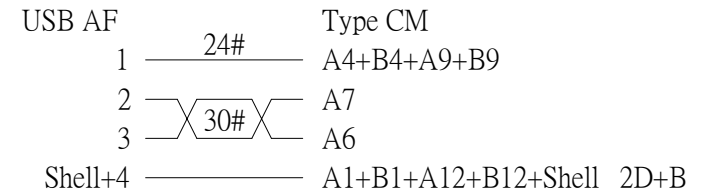

MAX 480M(0.5G)
 OPEN/SHORT TEST: 100% TEST.
 INSULATION: 5M.

⑤	PE	5g
④	Black 45P PVC	10g
③	USB AF(Whitie insulator,Nickel Plated)	1PCS
②	Type CM(Black Insulator,Nickel Plated),2.0,4PIN,5.1K,No Capacitance	1PCS
①	UL2725 30AWG*1P+1C*32AWG+1C*24AWG+2D(30#)+AB(16*9/0.06TA) OD=3.0mm Black PVC Jacket.	1PCS
No.	Description	Q'ty

Company		Goods Code	Draw	OYH	Date	2024.06.11
ITEM NO.	USB2.0-CMAF-0.5M	Drawing Evidence	Check	ML	Date	
Goods NO.			Approval		Date	
Original NO.		Unit(mm)	Audit		Date	



D		
C		
B		
VER.A	REVISE	Date