


DATENBLATT

KAB-SET-DF9-41S(20)-DF13-XXDS-0500LI

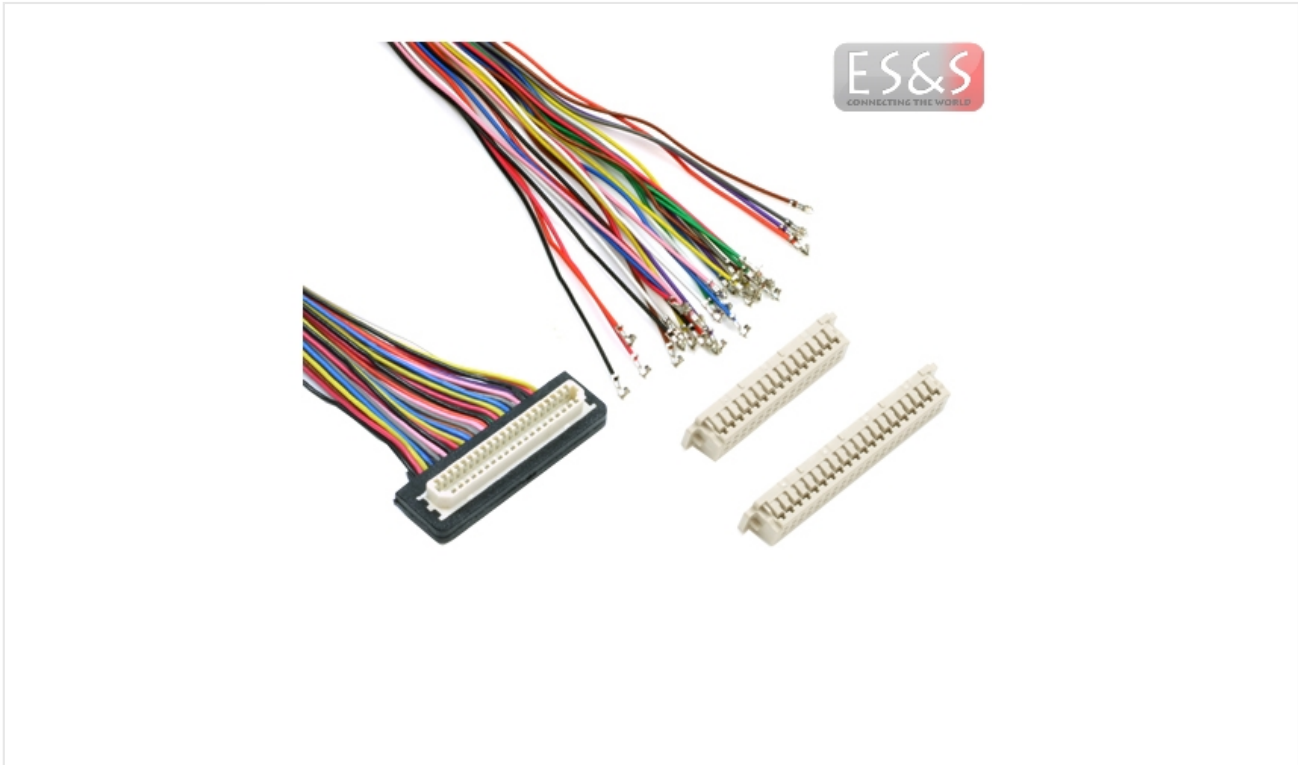

ES&S Solutions GmbH
Gewerbering 2
41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0
Fax: +49 (0)2162-266-18-88
E-Mail: info@esskabel.de

www.esskabel.de

Disclaimer: In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

KAB-SET-DF9-41S(20)-DF13-XXDS-0500LI

BESCHREIBUNG

Dieser Kabelsatz bietet Ihnen die Möglichkeit, schnell und einfach eine Verbindung zwischen einem Display mit einem Steckverbinder der Hirose DF9 Serie und einem beliebigen Grafikboardsteckverbinder der Hirose DF13 Serie herzustellen.

Wir liefern Ihnen 41 Einzellitzen mit einem DF9-41S-1V Steckverbinder montiert auf Seite 1. Seite 2 ist ungesteckt und hat lediglich bestückte Crimpkontakte inkl. zwei passenden DF 13 Leergehäusen.

Sie können ganz einfach nach Ihren eigenen Kabelplänen die Kontakte in die entsprechenden Gehäusekammern bestücken und so eine optimale Funktion zu den Signalstrukturen erzielen.

Dieses Kabel ist besonders für den Prototypenbau, Muster und Kleinserien geeignet.

TECHNISCHE DATEN:

- Seite 1: DF9-41S-1V(20), vergossen, 1:1 gesteckt
- Seite 2: DF13-30DS-1.25C, DF13-40DS-1.25C, ungesteckt
- 41 polige Einzellitzen AWG28 , UL1571, Länge = 500 mm,
- beiliegende Leergehäuse: DF13-30DS-1.25C, DF13-40DS-1.25C
- Temperaturbereich: -20 °C bis 85 °C
- Gewicht : 26,7 g

VORTEILE AUF EINEN BLICK:

- Mustermengen ab Lager verfügbar
- einseitig individuell selbst bestückbar
- andere Längen lieferbar
- Dieses Kabel wird einseitig ungesteckt mit zwei alternativ passenden Buchsen angeliefert

Die Konfektionierung dieser Leitung sowie die Herstellung eines anschlussfertigen Kabels (nach Ihren Kabelplänen, auch beidseitig bspw.) bieten wir Ihnen gerne an. Rufen Sie uns an, wir unterbreiten Ihnen ein unverbindliches Angebot.

Dieses Kabel passt zu nachfolgenden Stiftleisten:

DF13-30DS-1.25C, DF13-40DS-1.25C, DF9B-41P-1V, DF9A-41P-1V, DF9C-41P-1V, DF9-41P-1V, DF9MA-41P-1V

ES&S Solutions GmbH
Gewerbering 2
41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0
Fax: +49 (0)2162-266-18-88
E-Mail: info@esskabel.de

www.esskabel.de

Disclaimer: In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

KAB-SET-DF9-41S(20)-DF13-XXDS-0500LI

Folgende Display werden unterstützt:

AA121SL01, LB121S02, LB121S02-A2, LC201V02, LQ104S1DG21, LQ104S1DG61, LQ121S1DG11, LQ121S1DG31, LQ121S1DG61, LTM121S1-T01, LTM150XH-L06, NL8060BC26-17, NL8060BC26-28, NL8060BC31-17, NL8060BC31-17D, NL8060BC31-20, NL8060BC31-27, NL8060BC31-36, NL8060BC31-42, NL8060BC31-42D, T-51512D121J-FW-A-AB, T-51512D121J-FW-A-AC, T-51512D121J-FW-A-AE, T-51513D104J-FW-A-AD, LQ121S1DG41, NL8060BC31-50F

Folgende Boards werden unterstützt:

?D3544

ES&S Solutions GmbH
Gewerbering 2
41751 Viersen, Germany


Telefon: +49 (0)2162-266-18-0
Fax: +49 (0)2162-266-18-88
E-Mail: info@esskabel.de

www.esskabel.de

Disclaimer: In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

KAB-SET-DF9-41S(20)-DF13-XXDS-0500LI

BILDER

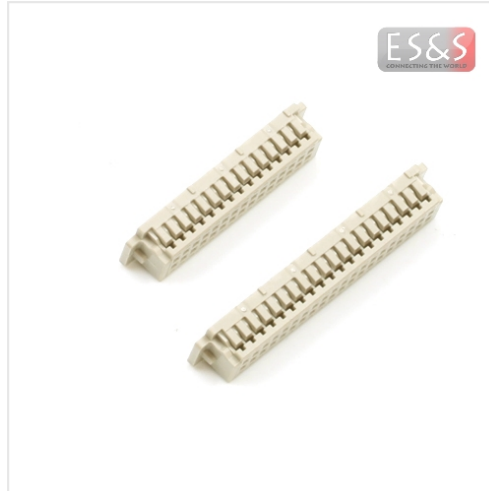

ES&S Solutions GmbH
Gewerbering 2
41751 Viersen, Germany

Telefon: +49 (0)2162-266-18-0
Fax: +49 (0)2162-266-18-88
E-Mail: info@esskabel.de

www.esskabel.de

Disclaimer: In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support