

DATENBLATT

KAB-DF13-12-RJ45M-0500RK-RUG-LED



BESCHREIBUNG

Cable assembly for our adapter [&NBSP;ADA-LAN-PANEL-LEDX2-RUGGED](#) for the extension of the RJ45 connector into an IP67-version.

TECHNICAL SPECIFICATIONS:

- side 1: DF13-12S-1.25C
- side 2: RJ45 male
- wire: CAT5, SFTP, l = 500 mm
- temperature -5°C bis +70°C
- RoHS

4 x separate strands for LED control, l = 500 mm




These cable assemblies can be manufactured in various customized lengths e.g.:

length = 180 mm our item name: KAB-DF13-12-RJ45M-[0180](#)RK-RUG-LED

length = 350 mm our item name: KAB-DF13-12-RJ45M-[0350](#)RK-RUG-LED

Disclaimer: In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

BILDER

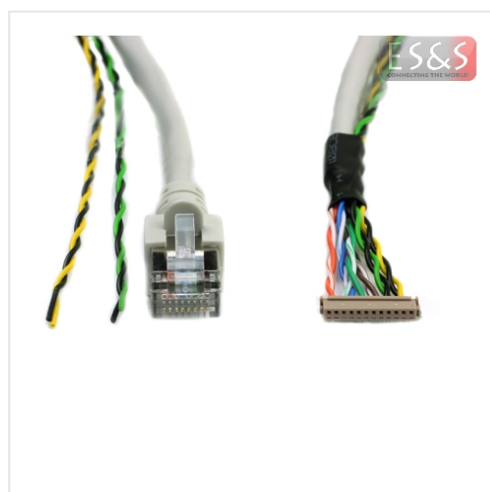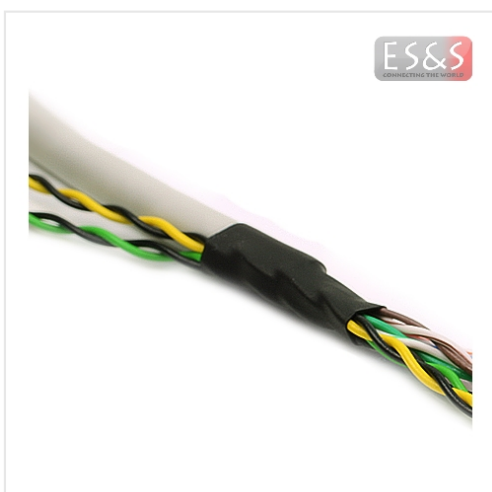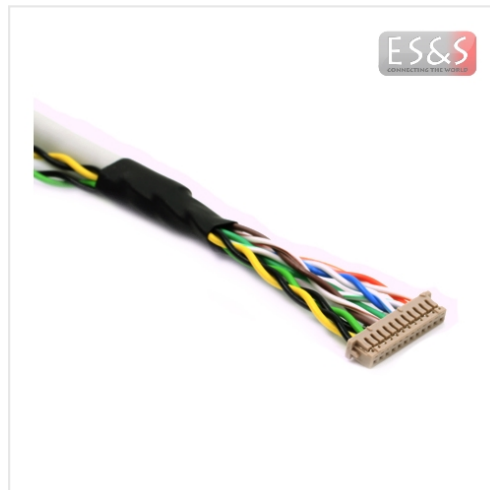

Disclaimer: In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support